

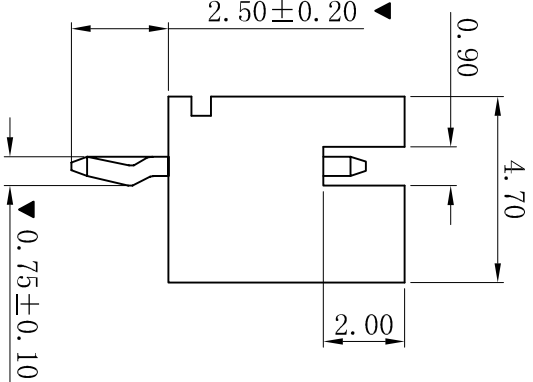
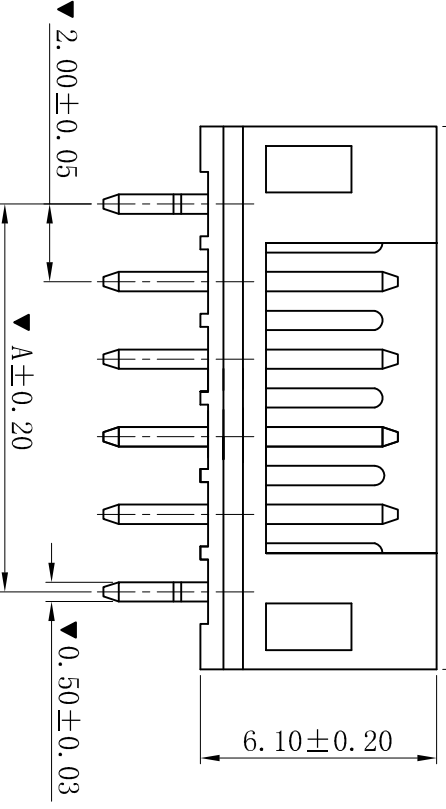


ROHS HF

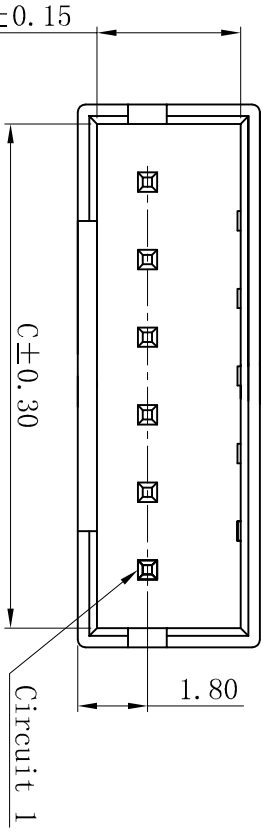

P.C.B LAYOUT

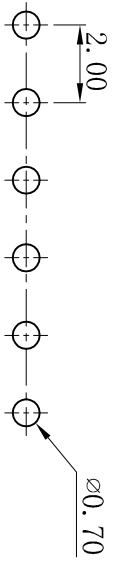

■ SPECIFICATIONS

- Voltage rating: 100V AC, DC
- Current rating: 2A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25°C~+85°C
- Contact resistance: 10mΩ max

■ WAFER

- Part No. : W2001V-NP-HF-WL2.5
 - Poles : 02-16P
 - Housing Material : PA66 UL94V-0, HALOGEN FREE
 - Pin Material : Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded
 - Solder Ability: More Than 95% of Tin Area
- Temperature: 255±5°C,
Time: 2.5±0.5 Second.

Poles	Dimension (mm)		
	A	B	C
02	2.00	6.00	5.00
03	4.00	8.00	7.00
04	6.00	10.00	9.00
05	8.00	12.00	11.00
06	10.00	14.00	13.00
07	12.00	16.00	15.00
08	14.00	18.00	17.00
09	16.00	20.00	19.00
10	18.00	22.00	21.00
11	20.00	24.00	23.00
12	22.00	26.00	25.00
13	24.00	28.00	27.00
14	26.00	30.00	29.00
15	28.00	32.00	31.00
16	30.00	34.00	33.00

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

更新图面	2019-06-03	陈雄军
修订版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明		承认

更新图面	2019-06-03	陈雄军
修订版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明		承认

投影法 Projection	第一角法	品名 (PART NAME)	PH 2.00mm 180° Wafer Connector Series	料号 (PART NO)	W2001V-NP-HF-WL2.5	状态码	C
单位 Unit	MM	大小/SIZE	A4	页码/SHEET	1/1		
比例/Scale	1:1	版本/Rev	D				

版次 REV.	1	说明 DESCRIPTION	日期 DATE	承认 APPRO.	日期/DATE	胡进	2019-06-03	陈雄军	2011-05-24	陈雄军	2013-12-27	陈雄军	2015-11-04	陈雄军	2019-06-03
------------	---	-------------------	------------	--------------	---------	----	------------	-----	------------	-----	------------	-----	------------	-----	------------