
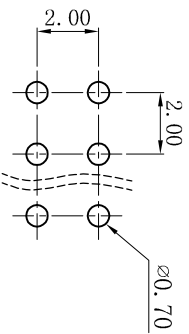
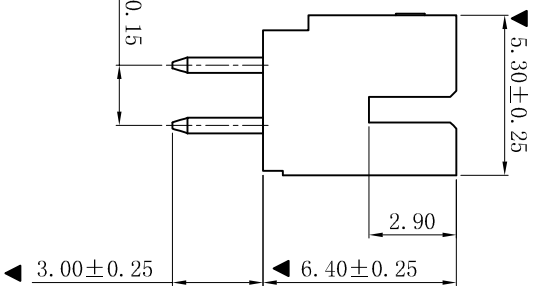
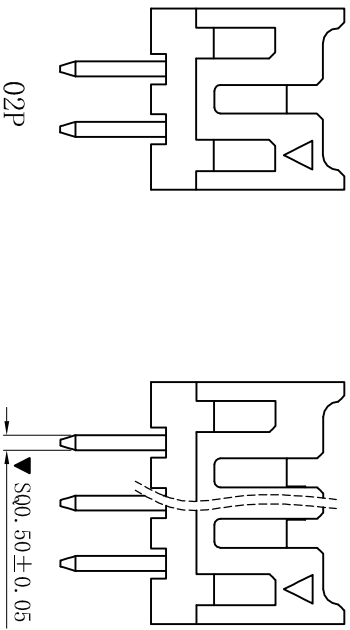


ROHS

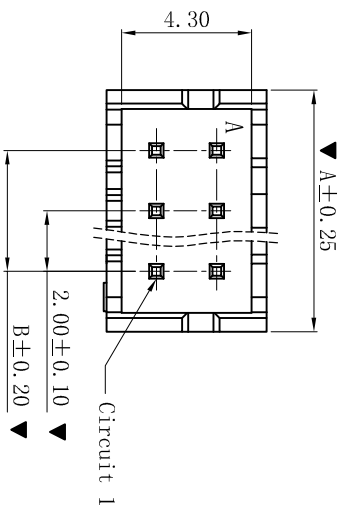

P. C. B LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C ~ +105° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W2005V-2xNP-JM
- Poles : 04-40P
- Housing Material: PA9T UL94V-0
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

PART NO.	Dimension (mm)	
	A	B
2x02	6.00	2.00
2x03	8.00	4.00
2x04	10.00	6.00
2x05	12.00	8.00
2x06	14.00	10.00
2x07	16.00	12.00
2x08	18.00	14.00
2x09	20.00	16.00
2x10	22.00	18.00
2x11	24.00	20.00
2x12	26.00	22.00
2x13	28.00	24.00
2x14	30.00	26.00
2x15	32.00	28.00
2x16	34.00	30.00
2x17	36.00	32.00
2x18	38.00	34.00
2x19	40.00	36.00
2x20	42.00	38.00

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
ANGLE: ±1°	

XYDZ® 东莞市祥运连接器有限公司
Connectors Dongguan XiangYun Connector's CO., Ltd

投影法 Projection	第一角投影法 First Angle Projection	单位 Unit	MM	品名 (PART NAME)	PHD 2.00mm 180° Wafer Connector Series
审核/CHECK	陈雄军	比例/Scale	1:1	料号 (PART NO)	W2005V-2xNP-JM
批准/APPRO	胡进	页码/SHEET	1/1	状态码	C
日期/DATE	2019-08-03	版本/Rev	A		

版本号 REV.	A	说明 DESCRIPTION	新版本	日期 DATE	2019-08-06	承认 APPRO.	郑文强
-------------	---	-------------------	-----	------------	------------	--------------	-----