
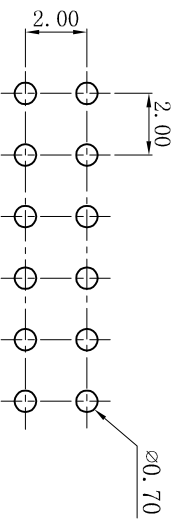
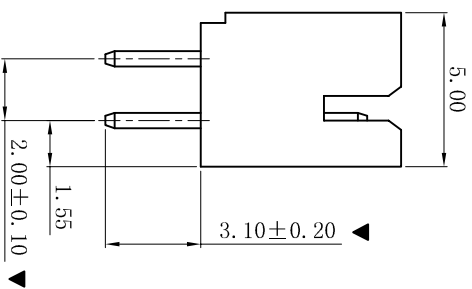
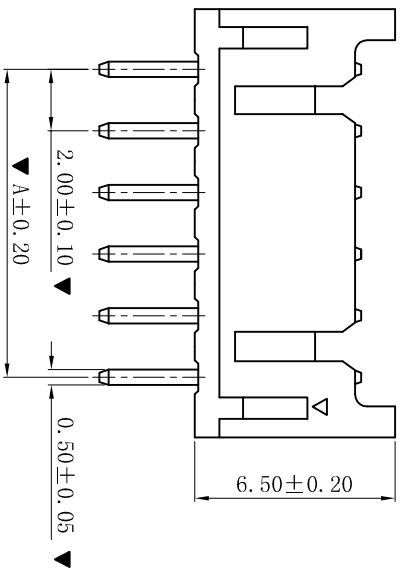


ROHS

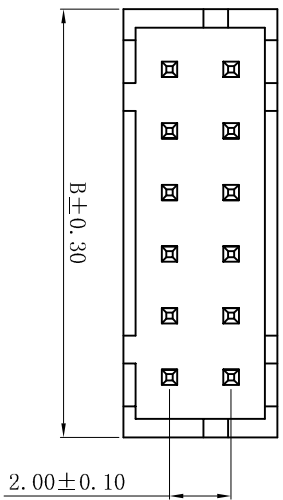


P.C.B LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W2005V-2xNP
- Poles : 04-40P
- Housing Material : PA66 UL94V-0
- Pin Material : Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked "▼" Must Be Recorded



Poles	Dimension (mm)	
	A	B
2x02	2.00	6.00
2x03	4.00	8.00
2x04	6.00	10.00
2x05	8.00	12.00
2x06	10.00	14.00
2x07	12.00	16.00
2x08	14.00	18.00
2x09	16.00	20.00
2x10	18.00	22.00
2x11	20.00	24.00
2x12	22.00	26.00
2x13	24.00	28.00
2x14	26.00	30.00
2x15	28.00	32.00
2x16	30.00	34.00
2x17	32.00	36.00
2x18	34.00	38.00
2x19	36.00	40.00
2x20	38.00	42.00

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd

Connectors



投影法  
Projection

单位 Unit

比例/Scale

页码/SHEET

版本/Rev

品名  
(PART NAME)

料号  
(PART NO)

PHD 2.00mm 180° Wafer  
Connector Series

W2005V-2xNP

状态码

C

一般公差  
GENERAL TOLERANCE:  
0±0.30  
.0±0.25  
.00±0.20  
.000±0.05  
ANGLE: ±1°

绘图/DR

审核/CHECK

日期/DATE

日期/DATE

更新图面  
2019-06-03  
陈雄军  
P.C. Draw

修订版本  
2015-11-04  
陈雄军

变更图宽格式内容  
2013-12-27  
陈雄军

新版本  
2011-05-24  
陈雄军

说明  
DESCRIPTION

D	更新图面	2019-06-03	陈雄军	承认
C	修订版本	2015-11-04	陈雄军	
B	变更图宽格式内容	2013-12-27	陈雄军	
A	新版本	2011-05-24	陈雄军	

1	版次	说明	日期	承认
2	REV.	DESCRIPTION	DATE	APPRO.