

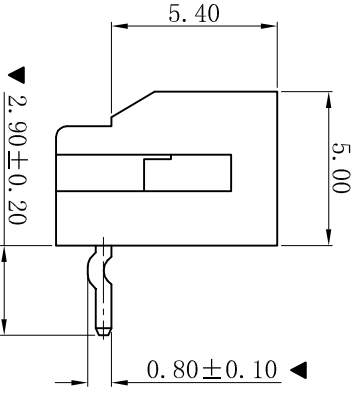
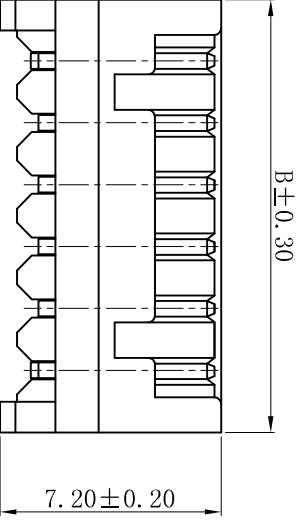


RoHS

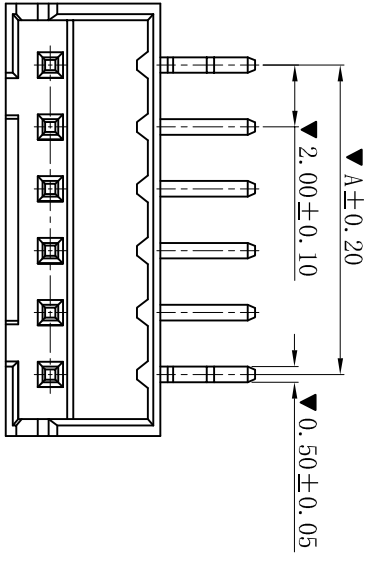

P. C. B LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W2006R-NP
- Poles : 02-15P
- Housing Material: PA6T UL94V-0
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00

D	更新图面	2019-06-03	陈雄军	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1°
C	修打版本	2015-11-04	陈雄军	修打版本	2015-11-04	陈雄军	绘图/DR P.C. Draw
B	变更图宽格式内容	2013-12-27	陈雄军	审核/CHKC	2013-12-27	陈雄军	核准/APPRO 胡进
A	新版本	2011-05-24	陈雄军	日期/DATE	2011-05-24	陈雄军	日期/DATE 2019-06-03
H	版次 REV.	1	说明 DESCRIPTION	日期/DATE		承认 APPRO.	投影法 Projection 单位 Unit MM 比例/Scale 1:1 大小/Size A4 页码/SHEET 1/1 版本/Rev D

XYDZ® 东莞市祥运连接器有限公司  
Dongguan XiangYun Connectors CO., Ltd

品名 (PART NAME)	DF3 2.00mm 90° Wafer Connector Series
料号 (PART NO)	W2006R-NP
状态码	C