
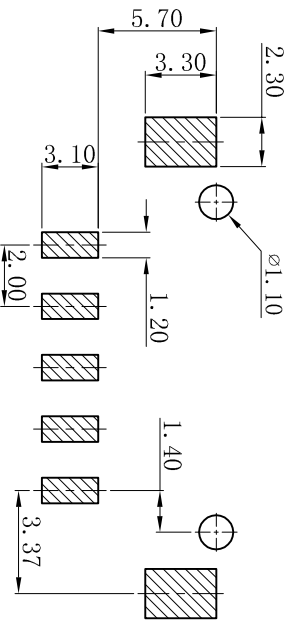
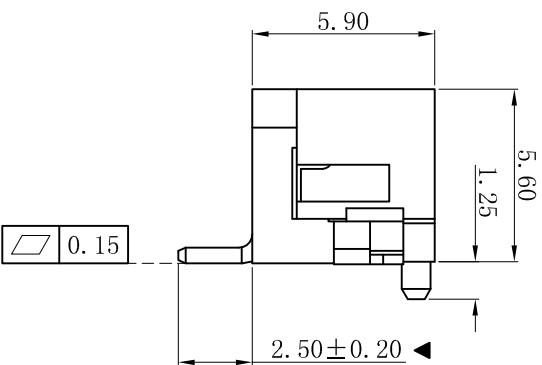
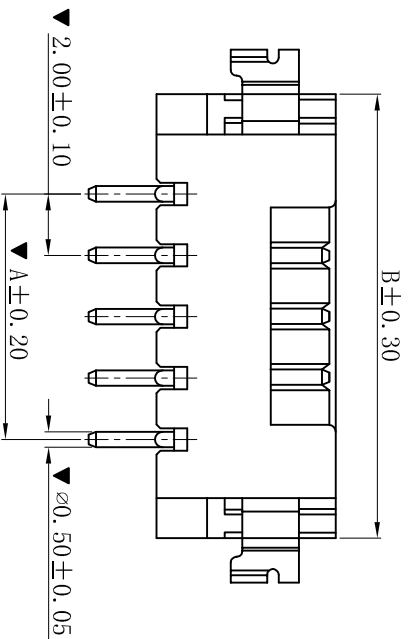


ROHS

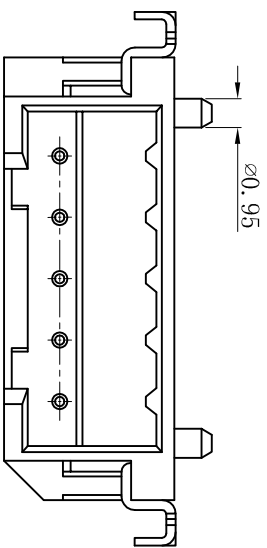

P. C. B LAYOUT

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25 °C~+85° C
 - Contact resistance: 20mΩ max

■ WAFER

- Part No. : W2006SRD-NP
- Poles : 02-15P
- Housing Material : PA6T UL94V-0
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)	
	A	B
02	2.00	8.50
03	4.00	10.50
04	6.00	12.50
05	8.00	14.50
06	10.00	16.50
07	12.00	18.50
08	14.00	20.50
09	16.00	22.50
10	18.00	24.50
11	20.00	26.50
12	22.00	28.50
13	24.00	30.50
14	26.00	32.50
15	28.00	34.50

D	更新图画	2019-06-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
1	版次	DESCRIPTION	APPRO.

一般公差	0±0.30
GENERAL TOLERANCE:	.0±0.25
	.000±0.20
	.000±0.05
ANGLE: ±1°	
绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法
Projection
单位 Unit
MM
比例/Scale
1:1
大小/Size
A4
页码/SHEET
1/1
版本/Rev
D

品名
(PART NAME)
DF3 2.00mm SMT 90° Wafer
Connector Series

料号
(PART NO)
W2006SRD-NP

状态码
C