
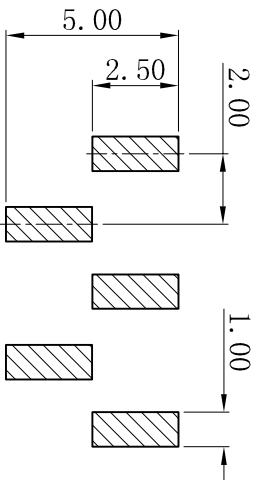
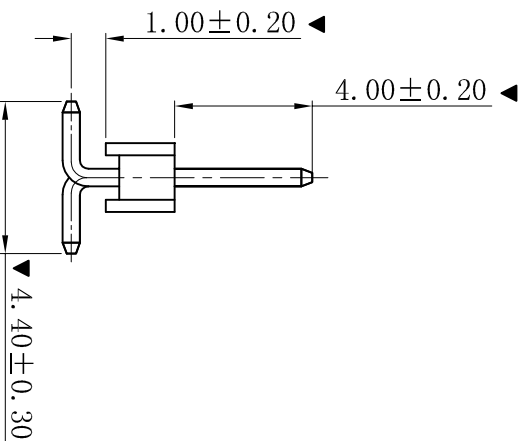
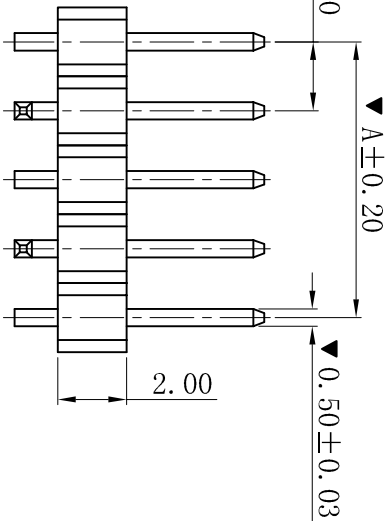


ROHS

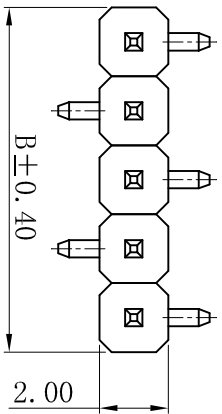

P.C.B LAYOUT

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER**
- Part No. : W2010SV-NP
 - Poles : 02-40P
 - Housing Material : PA6T UL94V-0 Black
 - Pin Material : Brass
 - Contact Area Plating: Gold-flash
 - The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)		Dimension (mm)	
	A	B	A	B
02	2.00	4.00	22	42.00
03	4.00	6.00	23	44.00
04	6.00	8.00	24	46.00
05	8.00	10.00	25	48.00
06	10.00	12.00	26	50.00
07	12.00	14.00	27	52.00
08	14.00	16.00	28	54.00
09	16.00	18.00	29	56.00
10	18.00	20.00	30	58.00
11	20.00	22.00	31	60.00
12	22.00	24.00	32	62.00
13	24.00	26.00	33	64.00
14	26.00	28.00	34	66.00
15	28.00	30.00	35	68.00
16	30.00	32.00	36	70.00
17	32.00	34.00	37	72.00
18	34.00	36.00	38	74.00
19	36.00	38.00	39	76.00
20	38.00	40.00	40	78.00
21	40.00	42.00		80.00

D	更新图档	2019-06-03	陈雄军	更新图档	2019-06-03	陈雄军	0±0.30 -0±0.25 .00±0.20 .000±0.05
C	修订版本	2015-11-04	陈雄军	修订版本	2015-11-04	陈雄军	ANGLE: ±1°
B	变更图宽格式内容	2013-12-27	陈雄军	审核/CHKC	2013-12-27	陈雄军	一般公差 GENERAL TOLERANCE:
A	新版本	2011-05-24	陈雄军	核准/APPRO	2011-05-24	胡进	绘图/DR
H	说明		承认	日期/DATE			单位 Unit
1	版次 RRV.			日期/DATE			MM
	DESCRIPTION			日期/DATE			比例/Scale
				日期/DATE			1:1
				日期/DATE			大小/Size
				日期/DATE			A4
				日期/DATE			页码/SHEET
				日期/DATE			1/1
				日期/DATE			版本/Rev
				日期/DATE			D

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connector's CO., Ltd

品名 (PART NAME)	杜邦2.00mm SMT 180° 排针 Connector Series
料号 (PART NO)	W2010SV-NP
投影法 Projection	第一角投影
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/SHEET	1/1
版本/Rev	D
状态码	C