
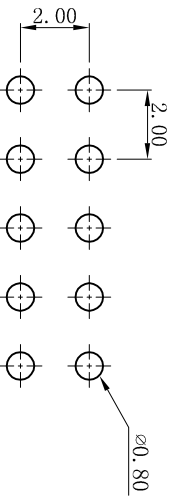
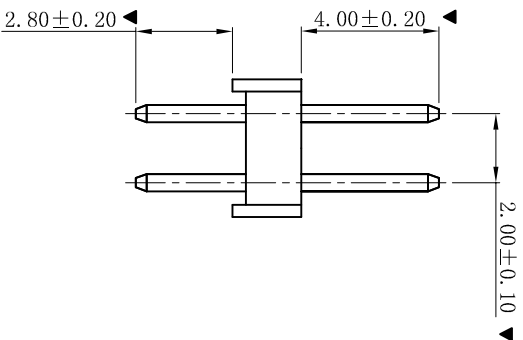
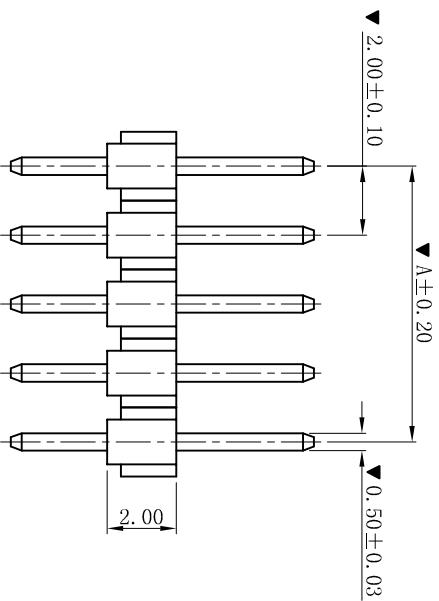


RoHS

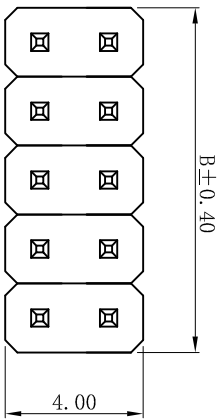

P.C.B LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W2010V-2xNP
- Poles : 04-80P
- Housing Material: PBT UL94V-0 Black
- Pin Material: Brass
- Contact Area Plating: Gold-flash
- The Dimension Marked "▲" Must Be Recorded

Poles	Dimension (mm)		Dimension (mm)		
	A	B	A	B	
2x02	2.00	4.00	2x22	42.00	44.00
2x03	4.00	6.00	2x23	44.00	46.00
2x04	6.00	8.00	2x24	46.00	48.00
2x05	8.00	10.00	2x25	48.00	50.00
2x06	10.00	12.00	2x26	50.00	52.00
2x07	12.00	14.00	2x27	52.00	54.00
2x08	14.00	16.00	2x28	54.00	56.00
2x09	16.00	18.00	2x29	56.00	58.00
2x10	18.00	20.00	2x30	58.00	60.00
2x12	20.00	22.00	2x31	60.00	62.00
2x12	22.00	24.00	2x32	62.00	64.00
2x13	24.00	26.00	2x32	64.00	66.00
2x14	26.00	28.00	2x34	66.00	68.00
2x15	28.00	30.00	2x35	68.00	70.00
2x16	30.00	32.00	2x36	70.00	72.00
2x17	32.00	34.00	2x37	72.00	74.00
2x18	34.00	36.00	2x38	74.00	76.00
2x19	36.00	38.00	2x39	76.00	78.00
2x20	38.00	40.00	2x40	78.00	80.00
2x21	40.00	42.00			

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

一般公差
 GENERAL TOLERANCE:
 0±0.30
 .0±0.25
 .00±0.20
 .000±0.05
 ANGLE: ±1°

投影法
 Projection
 单位 Unit
 MM
 比例/Scale
 1:1
 大小/Size
 A4
 页码/SHEET
 1/1
 版本/Rev
 D

品名 (PART NAME)
 杜邦 2.00mm 180° 排针
 Connector Series

料号 (PART NO)
 W2010V-2xNP
 状态码
 C

审核/CHKC
 陈雄军
 批准/APPRO
 胡进
 日期/DATE
 2019-06-03

更新图画
 2019-06-03
 陈雄军
 修订版本
 2015-11-04
 陈雄军
 变更图宽格式内容
 2013-12-27
 陈雄军
 新版本
 2011-05-24
 陈雄军
 说明
 2011-05-24
 陈雄军
 版次
 2011-05-24
 陈雄军

DESCRPTION
 DATE
 APPRO.

1 2 3 4 5 6 7 8 9 10