


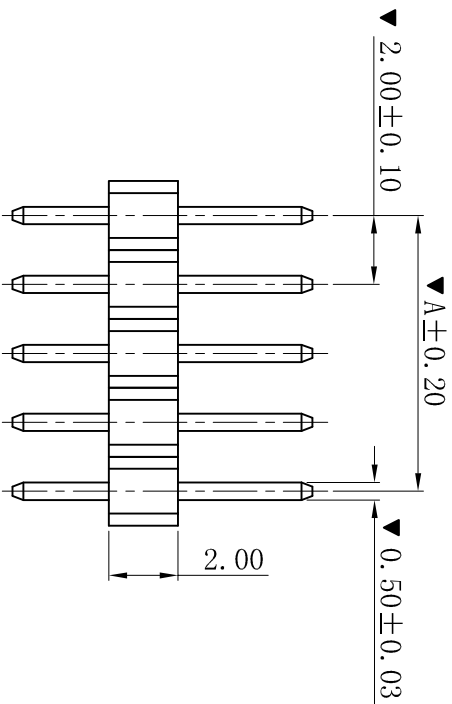


ROHS

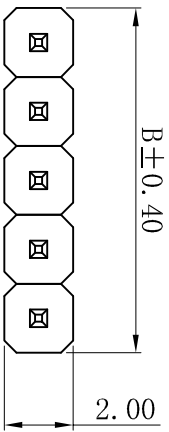

P.C.B LAYOUT



■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25° C~+85° C
- Contact resistance: 20m Ω max

■ WAFER

- Part No. : W2010V-NP
- Poles : 02-40P
- Housing Material : PBT UL94V-0 Black
- Pin Material : Brass
- Contact Area Plating: Gold-flash
- The Dimension Marked "▼" Must Be Recorded

Poles	Dimension (mm)		Poles	Dimension (mm)	
	A	B		A	B
02	2.00	4.00	22	42.00	44.00
03	4.00	6.00	23	44.00	46.00
04	6.00	8.00	24	46.00	48.00
05	8.00	10.00	25	48.00	50.00
06	10.00	12.00	26	50.00	52.00
07	12.00	14.00	27	52.00	54.00
08	14.00	16.00	28	54.00	56.00
09	16.00	18.00	29	56.00	58.00
10	18.00	20.00	30	58.00	60.00
11	20.00	22.00	31	60.00	62.00
12	22.00	24.00	32	62.00	64.00
13	24.00	26.00	33	64.00	66.00
14	26.00	28.00	34	66.00	68.00
15	28.00	30.00	35	68.00	70.00
16	30.00	32.00	36	70.00	72.00
17	32.00	34.00	37	72.00	74.00
18	34.00	36.00	38	74.00	76.00
19	36.00	38.00	39	76.00	78.00
20	38.00	40.00	40	78.00	80.00
21	40.00	42.00			

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
绘图/DR	P.P. Chau
审核/CHK	陈雄军
日期/DATE	2019-06-03

投影法
Projection

单位 Unit
MM

比例/Scale
1:1

大小/Size
A4

页码/Sheet
1/1

版本/Rev
D

D	更新图档	2019-06-03	P.P. Chau	陈雄军	承认	日期	2011-05-24	说明	新版本
C	修订版本	2015-11-04	陈雄军	陈雄军	承认	日期	2011-05-24	说明	变更图宽格式内容
B	变更图宽格式内容	2013-12-27	陈雄军	陈雄军	承认	日期	2011-05-24	说明	新版本
A	新图档	2011-05-24	陈雄军	陈雄军	承认	日期	2011-05-24	说明	新图档
H	版次	REV.	1	1	1	1	1	1	1

品名 (PART NAME)	杜邦2.00mm 180° 排针 Connector Series
料号 (PART NO)	W2010V-NP
状态码	C