
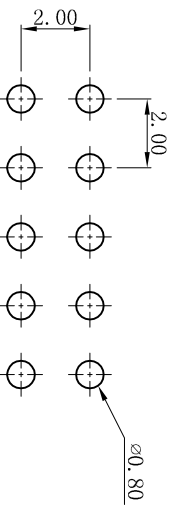
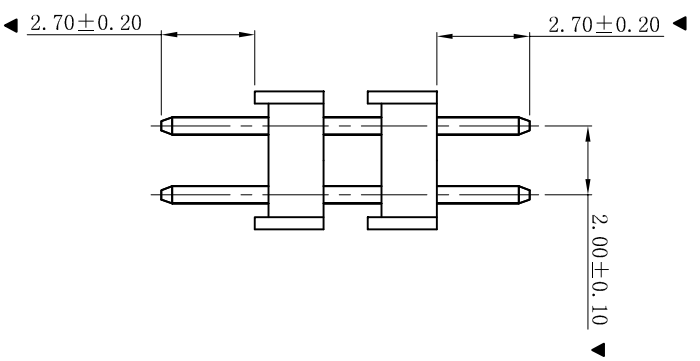
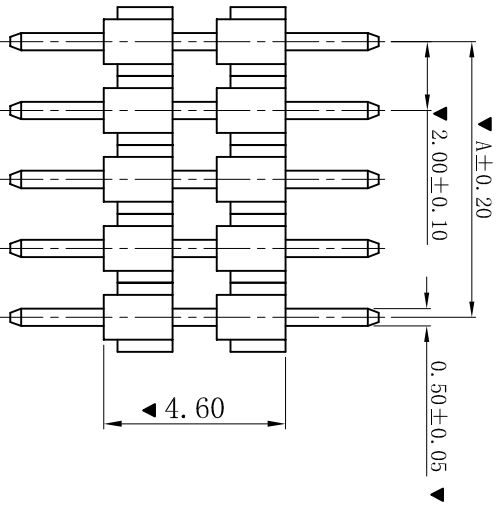


ROHS

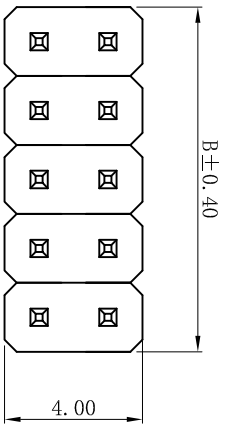

P. C. B LAYOUT

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
  - Current rating: 3A, AC, DC
  - Withstanding Voltage: 800V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C ~ +85° C
  - Contact resistance: 20mΩ max

- WAFER
- Part No. : W2010VJ-2xNP-S2. 7D2. 7
  - Poles : 04-80P
  - Housing Material: PBT UL94V-0 Black
  - Pin Material: Brass
  - Contact Area Plating: Gold-flash
  - The Dimension Marked “▼” Must Be Recorded

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .000±0.20 ANGLE: ±1°	投影法 Projection		XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd	
修订版本		2015-11-04	陈雄军	绘图/DR		陈雄军	单位 Unit		品名 (PART NAME)	
变更图宽格式内容		2013-12-27	陈雄军	审核/CHECK		胡进	比例/Scale		杜邦 2.00mm 180° 排针 Connector Series	
新版本		2011-05-24	陈雄军	批准/APPRO		胡进	大小/Size		料号 (PART NO)	
说明 DESCRIPTION		日期 DATE	承认 APPRO.	日期/DATE		2019-06-03	页码/SHEET		W2010VJ-2xNP-S2. 7D2. 7	
版次 REV.		1		日期/DATE		2019-06-03	版本/Rev		D	
		1		日期/DATE		2019-06-03	版本/Rev		D	

H

G

F

E

D

C

B

A

10

9

8

7

6

5

4

3

2

1

10

9

8

7

6

5

4

3

2

1