
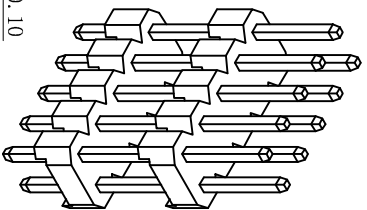
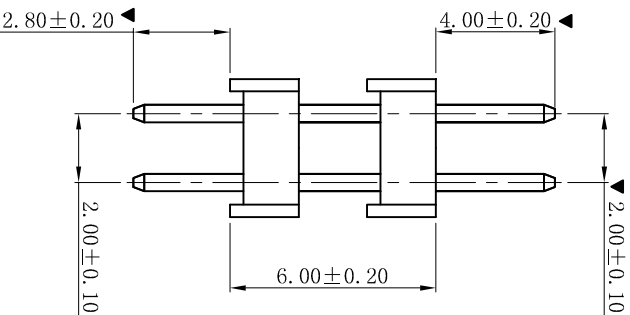
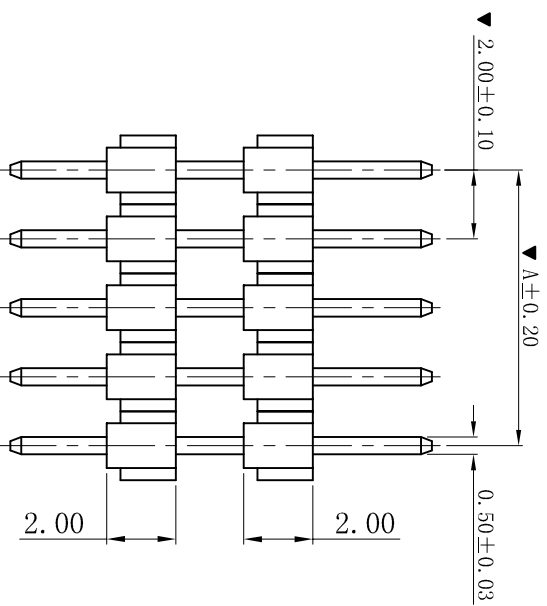


ROHS

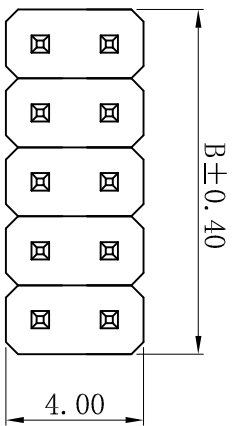

■ SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C +85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W2010VJ-2xNP
- Poles : 04-80P
- Housing Material: PBT UL94V-0 Black
- Pin Material: Brass
- Contact Area Plating: Gold-flash
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)		Dimension (mm)		
	A	B	A	B	
2x02	2.00	4.00	2x22	42.00	44.00
2x03	4.00	6.00	2x23	44.00	46.00
2x04	6.00	8.00	2x24	46.00	48.00
2x05	8.00	10.00	2x25	48.00	50.00
2x06	10.00	12.00	2x26	50.00	52.00
2x07	12.00	14.00	2x27	52.00	54.00
2x08	14.00	16.00	2x28	54.00	56.00
2x09	16.00	18.00	2x29	56.00	58.00
2x10	18.00	20.00	2x30	58.00	60.00
2x12	20.00	22.00	2x31	60.00	62.00
2x12	22.00	24.00	2x32	62.00	64.00
2x13	24.00	26.00	2x32	64.00	66.00
2x14	26.00	28.00	2x34	66.00	68.00
2x15	28.00	30.00	2x35	68.00	70.00
2x16	30.00	32.00	2x36	70.00	72.00
2x17	32.00	34.00	2x37	72.00	74.00
2x18	34.00	36.00	2x38	74.00	76.00
2x19	36.00	38.00	2x39	76.00	78.00
2x20	38.00	40.00	2x40	78.00	80.00
2x21	40.00	42.00			

P. C. B LAYOUT

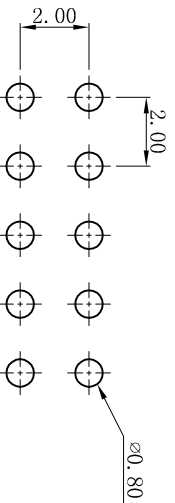

D	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .00±0.25 .000±0.20 ANGLE: ±1°	投影法 Projection 单位 Unit MM	品名 (PART NAME)	杜邦 2.00mm 180° 双层排针 Connector Series
C	修订版本	2015-11-04	陈雄军	绘图/DR 审核/CHECK 核准/APPRO	比例/Scale 大小/Size 页码/SHEET 版本/Rev	料号 (PART NO)	W2010VJ-2xNP
B	变更图览格式内容	2013-12-27	陈雄军	日期/DATE	日期/DATE	说明 DESCRIPTION	
A	新版本	2011-05-24	陈雄军	日期/DATE	日期/DATE	说明 DESCRIPTION	
H	版次 REV.		承认 APPRO.	日期/DATE	日期/DATE	说明 DESCRIPTION	

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----