
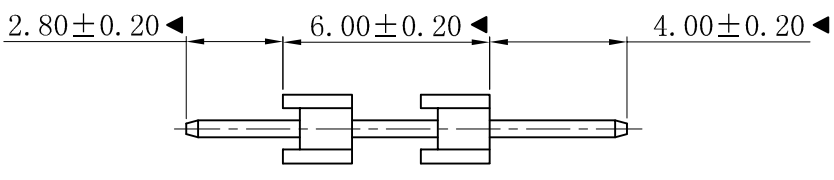
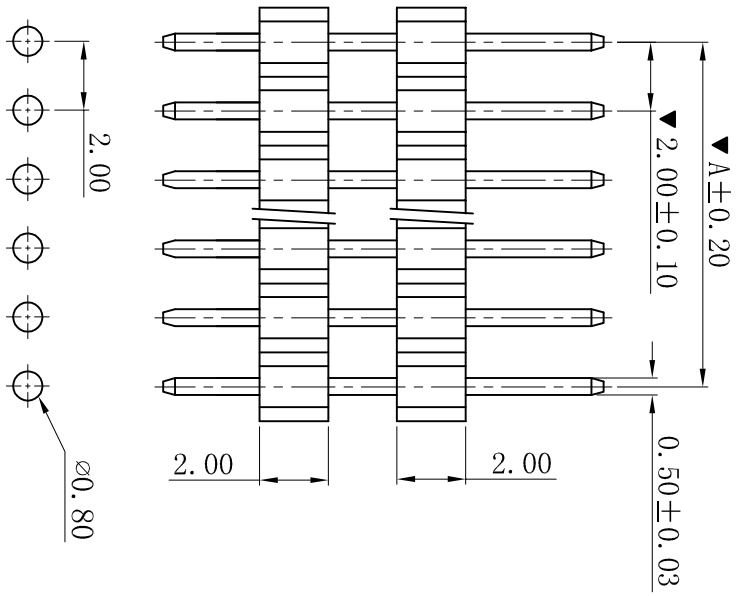


RoHS

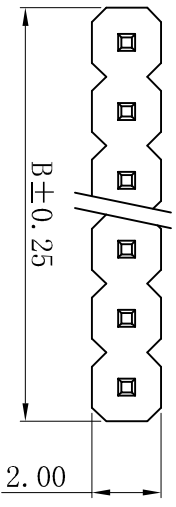

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C<sup>+</sup>+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W2010VJ-NP
- Poles : 02-40P
- Housing Material: PBT UL94V-0 Black
- Pin Material: Brass
- Contact Area Plating: Gold-flash
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)		Poles	Dimension (mm)	
	A	B		A	B
02	2.00	4.00	22	42.00	44.00
03	4.00	6.00	23	44.00	46.00
04	6.00	8.00	24	46.00	48.00
05	8.00	10.00	25	48.00	50.00
06	10.00	12.00	26	50.00	52.00
07	12.00	14.00	27	52.00	54.00
08	14.00	16.00	28	54.00	56.00
09	16.00	18.00	29	56.00	58.00
10	18.00	20.00	30	58.00	60.00
11	20.00	22.00	31	60.00	62.00
12	22.00	24.00	32	62.00	64.00
13	24.00	26.00	33	64.00	66.00
14	26.00	28.00	34	66.00	68.00
15	28.00	30.00	35	68.00	70.00
16	30.00	32.00	36	70.00	72.00
17	32.00	34.00	37	72.00	74.00
18	34.00	36.00	38	74.00	76.00
19	36.00	38.00	39	76.00	78.00
20	38.00	40.00	40	78.00	80.00
21	40.00	42.00			

P.C.B LAYOUT

更新图档		2019-06-03		P.C. Draw		一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05		投影法 Projection		品名 (PART NAME)		杜邦2.00mm 180° 双层排针 Connector Series	
修订版本		2015-11-04		陈雄军		绘图/DR		P.C. Draw		单位 Unit		料号 (PART NO)		W2010VJ-NP	
变更图宽格式内容		2013-12-27		陈雄军		审核/CHECK		陈雄军		比例/Scale		料号		W2010VJ-NP	
新版本		2011-05-24		陈雄军		批准/APPRO		胡进		大小/Size		料号		W2010VJ-NP	
说明		2011-05-24		陈雄军		日期/DATE		2019-06-03		页码/Sheet		料号		W2010VJ-NP	
版次		2011-05-24		陈雄军		日期/DATE		2019-06-03		版本/Rev		料号		W2010VJ-NP	
REV.		2011-05-24		陈雄军		日期/DATE		2019-06-03		版本/Rev		料号		W2010VJ-NP	

XYDZ® 东莞市祥运连接器有限公司  
Dongguan XiangYun Connectors CO., Ltd