


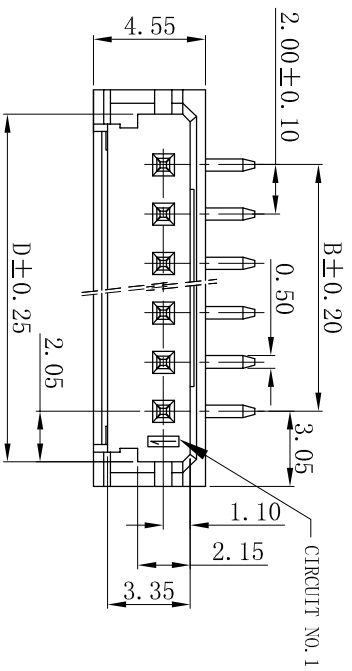
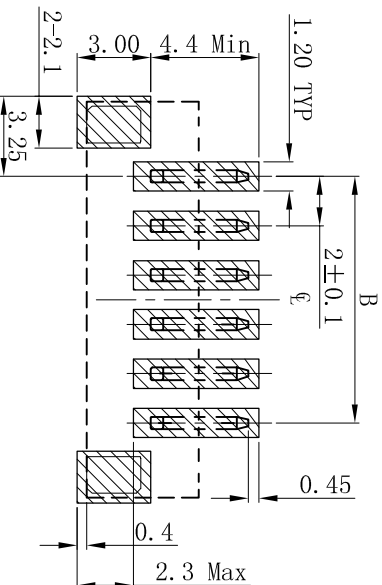


RoHS

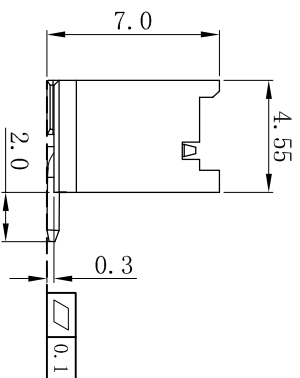

■ SPECIFICATIONS

- Voltage rating: 100V AC, DC
 - Current rating: 2A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25°C~+85°C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W2016SV-NP
 - Poles: 02-15P
 - Housing Material: Nylon46 UL94V-0, Natural.
 - Pin Material: Brass
 - Solde Tabs Material: Brass
 - Contact Area Plating: Tin-Plated

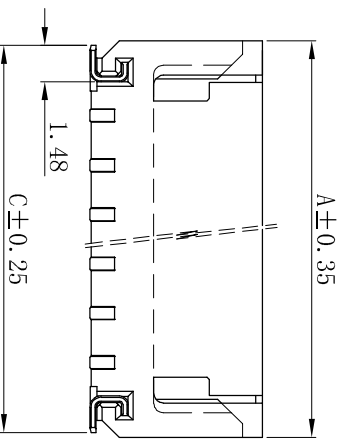

P. C. B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

PART NO.	Dimensions (mm)			
	A	B	C	D
02	8.1	2.0	7.7	6.1
03	10.1	4.0	9.7	8.1
04	12.1	6.0	11.7	10.1
05	14.1	8.0	13.7	12.1
06	16.1	10.0	15.7	14.1
07	18.1	12.0	17.7	16.1
08	20.1	14.0	19.7	18.1
10	24.1	18.0	23.7	22.1
12	28.1	22.0	27.7	26.1
13	30.1	24.0	29.7	28.1
15	34.1	28.0	33.7	32.1

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

Connectors



Molex2.00mm 55460 180°
Wafer Connector Series

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.05
	ANGLE: ±1°

投影法 Projection	第一角
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/SHEET	1/1
版本/Rev	A

品名 (PART NAME)	Molex2.00mm 55460 180° Wafer Connector Series
料号 (PART NO)	W2016SV-NP

绘图/DR	PPZ Draw
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-03-25

承认 APPRO.	PPZ Draw
日期 DATE:	2019-03-25

状态码	C
-----	---

新版本	
说明 DESCRIPTION	

板次 REV.	1
------------	---

1 2 3 4 5 6 7 8 9 10