
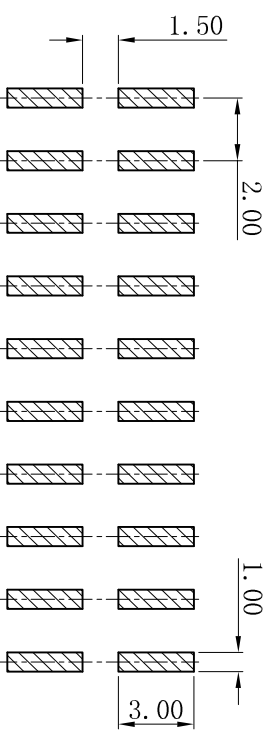
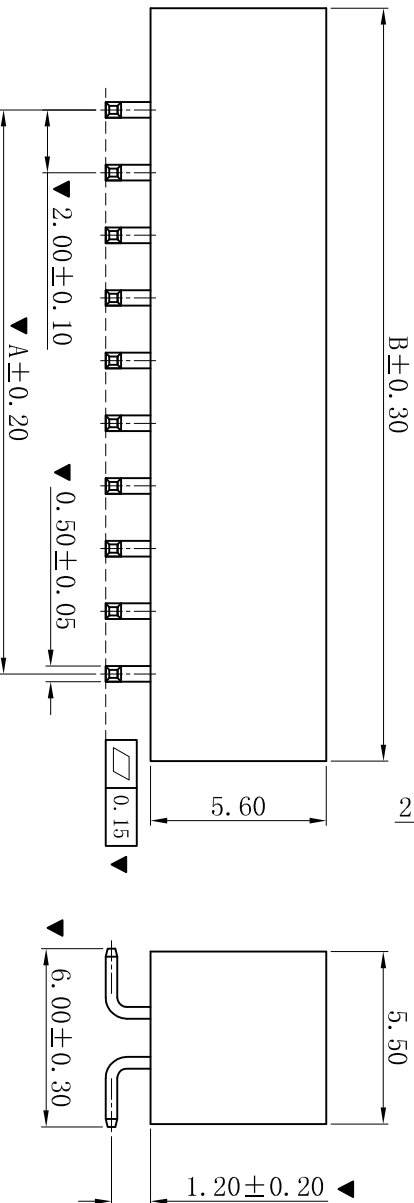


RoHS

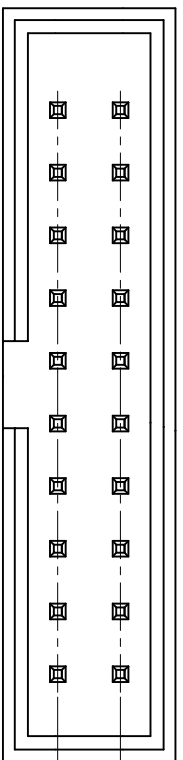

P.C.B LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
- Contact resistance: 20m Ω max

■ WAFER

- Part No. : WJL2010SV-2xNP
- Poles : 10-64P
- Housing Material: PA6T UL94V-0 Black
- Pin Material: Brass
- Contact Area Plating: Gold-Flash
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)		Poles		Dimension (mm)	
	A	B	A	B	A	B
2x05	8.00	17.10	2x19	36.00	45.10	
2x06	10.00	19.10	2x20	38.00	47.10	
2x07	12.00	21.10	2x21	40.00	49.10	
2x08	14.00	23.10	2x22	42.00	51.10	
2x09	16.00	25.10	2x23	44.00	53.10	
2x10	18.00	27.10	2x24	46.00	55.10	
2x11	20.00	29.10	2x25	48.00	57.10	
2x12	22.00	31.10	2x26	50.00	59.10	
2x13	24.00	33.10	2x27	52.00	61.10	
2x14	26.00	35.10	2x28	54.00	63.10	
2x15	28.00	37.10	2x29	56.00	65.10	
2x16	30.00	39.10	2x30	58.00	67.10	
2x17	32.00	41.10	2x31	60.00	69.10	
2x18	34.00	43.10	2x32	62.00	71.10	

XYDZ[®] 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors CO., Ltd

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: ANGLE: $\pm 1^{\circ}$		0 \pm 0.30 .0 \pm 0.25 .00 \pm 0.20 .000 \pm 0.05
修打版本		2015-11-04	陈雄军	绘图/DR	P.C.B	
变更图宽格式内容		2013-12-27	陈雄军	审核/CHECK	陈雄军	
新版本		2011-05-24	陈雄军	核准/APPRO	胡进	
说明		日期	承认	日期/DATE	2019-06-03	
DESCRPTION		DATE	APPRO.	日期/DATE	2019-06-03	

投影法 Projection	第一角	单位 Unit	MM	品名 (PART NAME)	2.00mm SMT 180 $^{\circ}$ 筒牛 Wafer		
比例/Scale	1:1	大小/Size	A4	(PART NO)	WJL2010SV-2xNP		
页码/SHEET	1/1	版本/Rev	D				料号