
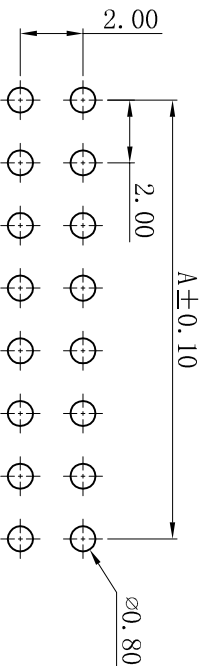
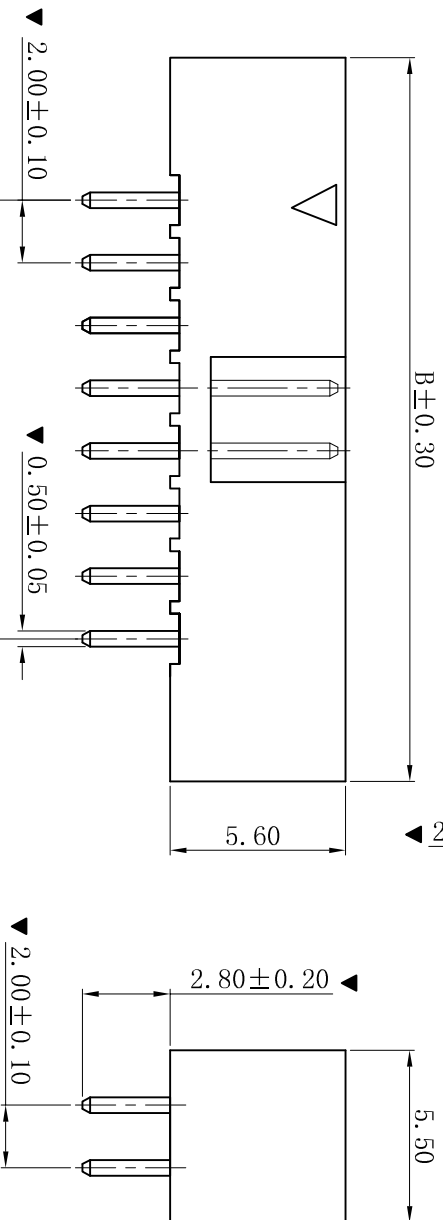


RoHS

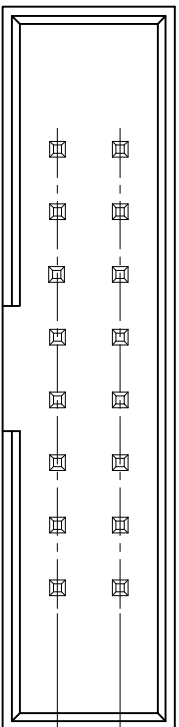

P.C.B LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: WJL2010V-2xNP
- Poles : 10-64P
- Housing Material: PBT UL94V-0 Black
- Pin Material: Brass
- Contact Area Plating: Gold-Flash
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)		Poles		Dimension (mm)	
	A	B	A	B	A	B
2x05	8.00	17.10	2x19	36.00	45.10	
2x06	10.00	19.10	2x20	38.00	47.10	
2x07	12.00	21.10	2x21	40.00	49.10	
2x08	14.00	23.10	2x22	42.00	51.10	
2x09	16.00	25.10	2x23	44.00	53.10	
2x10	18.00	27.10	2x24	46.00	55.10	
2x11	20.00	29.10	2x25	48.00	57.10	
2x12	22.00	31.10	2x26	50.00	59.10	
2x13	24.00	33.10	2x27	52.00	61.10	
2x14	26.00	35.10	2x28	54.00	63.10	
2x15	28.00	37.10	2x29	56.00	65.10	
2x16	30.00	39.10	2x30	58.00	67.10	
2x17	32.00	41.10	2x31	60.00	69.10	
2x18	34.00	43.10	2x32	62.00	71.10	

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

投影法  
Projection

单位 Unit  
MM

比例/Scale  
1:1

大小/Size  
A4

页码/Sheet  
1/1

版本/Rev  
D

D	更新图面	2019-06-03	陈雄军	承认	日期	2019-06-03
C	修訂版本	2015-11-04	陈雄军	承认	日期	2015-11-04
B	变更图宽格式内容	2013-12-27	陈雄军	承认	日期	2013-12-27
A	新版本	2011-05-24	陈雄军	承认	日期	2011-05-24
H	版次 REV.	说明 DESCRIPTION	承认 APPRO.	承认 APPRO.	日期 DATE.	日期 DATE.

品名 (PART NAME)	2.00mm 180° 筒牛 Wafer
料号 (PART NO)	WJL2010V-2xNP
连接器系列 Connector Series	
状态码	C