
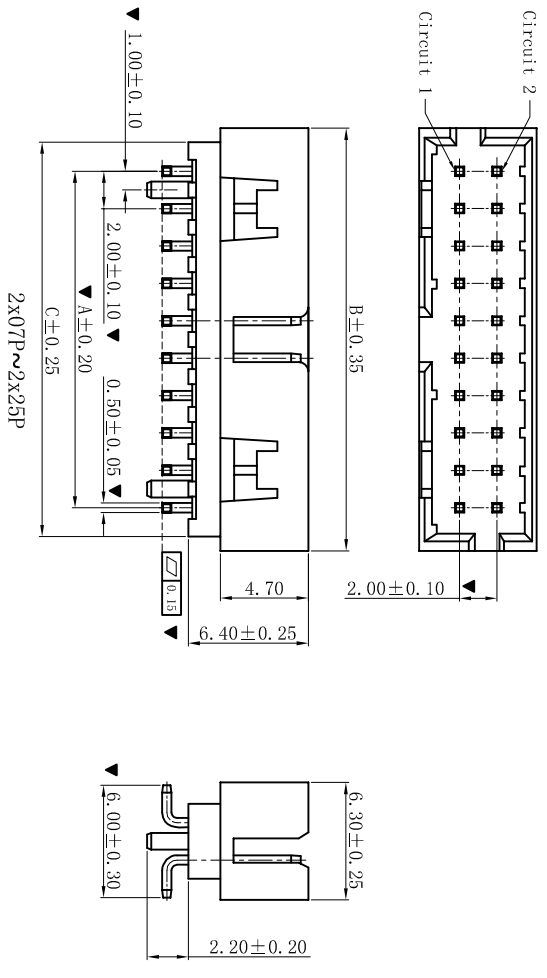
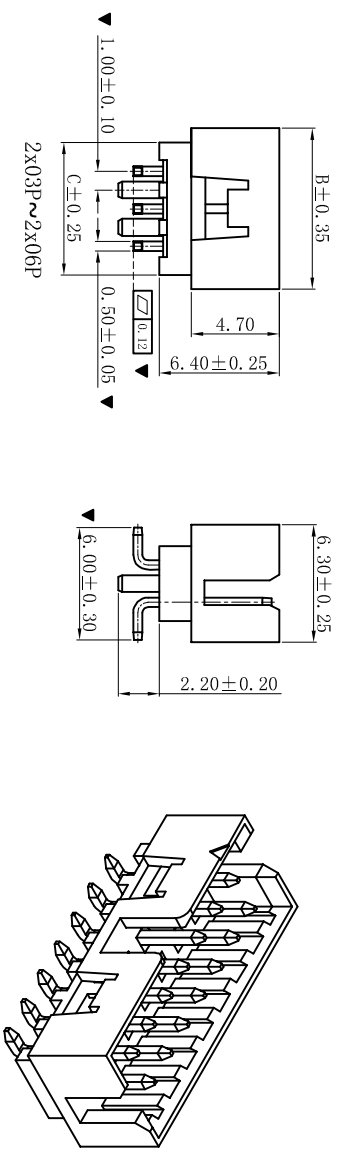


ROHS

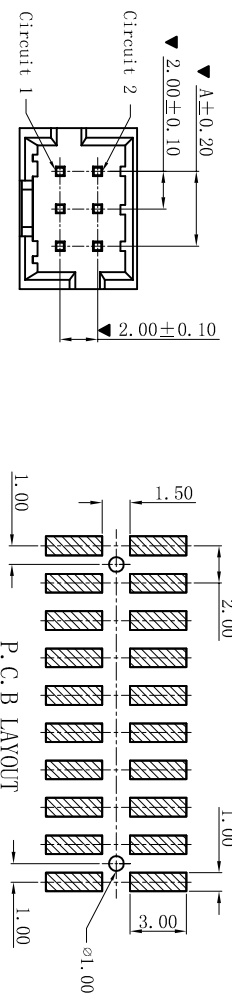

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max

- WAFER
- Part No. : WJLT2010SVD-2xNP
 - Poles : 06-50P
 - Housing Material: PA6T UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Gold-flash
 - The Dimension Marked "▲" Must Be Recorded

Poles	Dimension (mm)			Poles	Dimension (mm)		
	A	B	C		A	B	C
2x02	4.00	8.65	7.00	2x14	26.00	30.65	29.00
2x03	4.00	8.65	7.00	2x15	28.00	32.65	31.00
2x04	6.00	10.65	9.00	2x16	30.00	34.65	33.00
2x05	8.00	12.65	11.00	2x17	32.00	36.65	35.00
2x06	10.00	14.65	13.00	2x18	34.00	38.65	37.00
2x07	12.00	16.65	15.00	2x19	36.00	40.65	39.00
2x08	14.00	18.65	17.00	2x20	38.00	42.65	41.00
2x09	16.00	20.65	19.00	2x21	40.00	44.65	43.00
2x10	18.00	22.65	21.00	2x22	42.00	46.65	45.00
2x11	20.00	24.65	23.00	2x23	44.00	48.65	47.00
2x12	22.00	26.65	25.00	2x24	46.00	50.65	49.00
2x13	24.00	28.65	27.00	2x25	48.00	52.65	51.00

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

D	更新图画	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .00±0.25 .000±0.15 ANGLE: ±1°	更新图画	2019-06-03	陈雄军				
C	修订版本	2015-11-04	陈雄军	绘图/DR P.C. Draw	变更图宽格式内容	2013-12-27	陈雄军				
B	新版本	2011-05-24	陈雄军	审核/CHECK 胡进	新版本	2011-05-24	陈雄军				
A	说明	2011-05-24	陈雄军	批准/APPRO	说明	2011-05-24	陈雄军				
H	版次 REV.	1	2	3	4	5	6	7	8	9	10
DESCRIPTION		DATE		APPRO.		日期/DATE		日期/DATE		日期/DATE	

投影法 Projection	品名 (PART NAME)	料号 (PART NO)	状态码
第一角投影 1:1	2.00mm SWT 180° 筒牛 Wafer Connector Series	WJLT2010SVD-2xNP	C
单位 Unit	大小/Size	页码/Sheet	
MM	A4	1/1	
比例/Scale	版本/New		
1:1	D		