RoHS

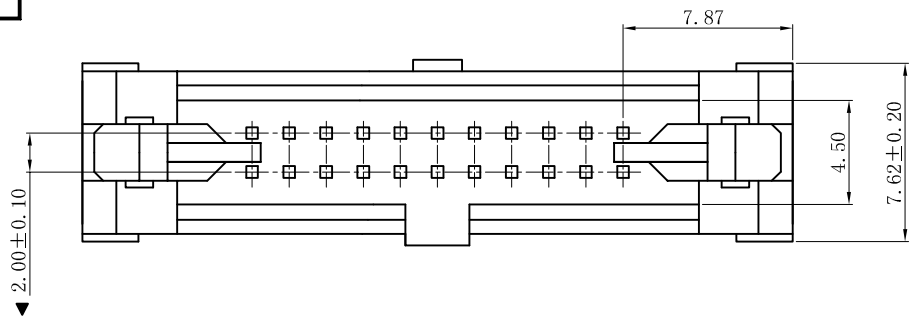

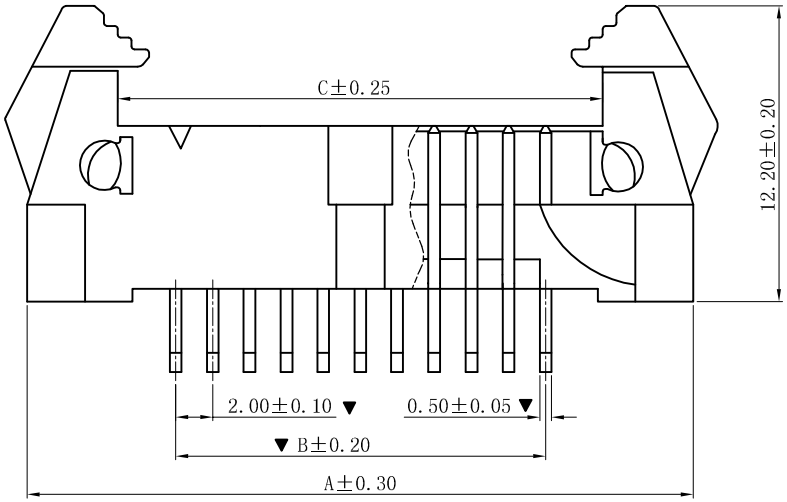

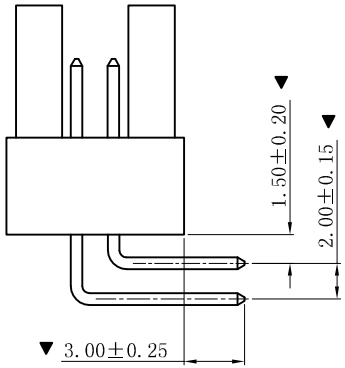

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance:1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

WAFER

- Part No.: WLJ2010R-2xNP
- Poles : 10-50P
- Housing Material: PBT UL94V-0 Black
- Pin Material: Brass
- Contact Area Plating: Gold-flash
- The Dimension Marked "▼" Must Be Recorded

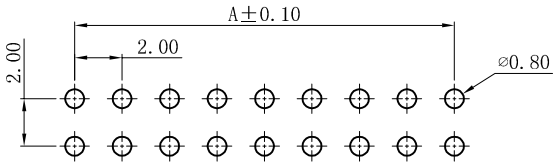

P.C.B LAYOUT

Poles	Dimensions (mm)		
	A	B	C
2x05	23.86	8.00	14.43
2x08	29.86	14.00	20.43
2x10	33.86	18.00	24.43
2x12	37.86	22.00	28.43
2x13	39.86	24.00	30.43
2x15	43.86	28.00	34.43
2x17	47.86	32.00	38.43
2x20	53.86	38.00	44.43
2x22	57.86	42.00	48.43
2x25	63.86	48.00	54.43

版次 REV.	说明 DESCRIPTION	日期 DATE.	承认 APPRO.
D	更新图面	2019-06-03	PH.Duan
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE. ±1°
绘图/DR	PH.Duan
审核/CHECK	陈雄军
核准/APPRO	胡 进
日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
Connectors DongGuan XiangYun Connectors CO.,Ltd

投影法 Projection	
单位 Unit	MM
比例/Scale	1:1
大小/SIZE	A4
页码/SHEET	1/1
版本/Rev	D

品 名 (PART NEME)	2.00mm 90° 牛角 Wafer Connector Series	
料 号 (PART NO)	WLJ2010R-2xNP	状态码 C