

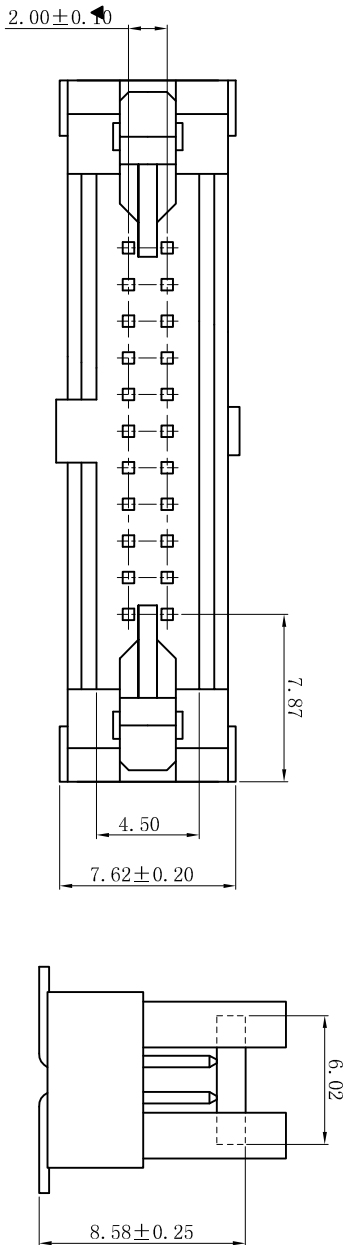


RoHS

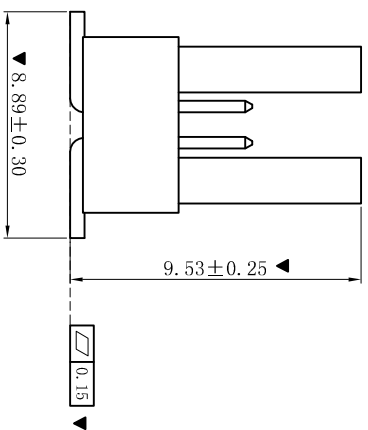

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25°C~+85°C
 - Contact resistance: 20mΩ max
- WAFER
- Part No. : WLJ2010SV-2xNP
 - Poles : 10-50P
 - Housing Material : PA6T UL94V-0 Black
 - Pin Material : Brass
 - Contact Area Plating: Gold-flash
 - The Dimension Marked "▼" Must Be Recorded

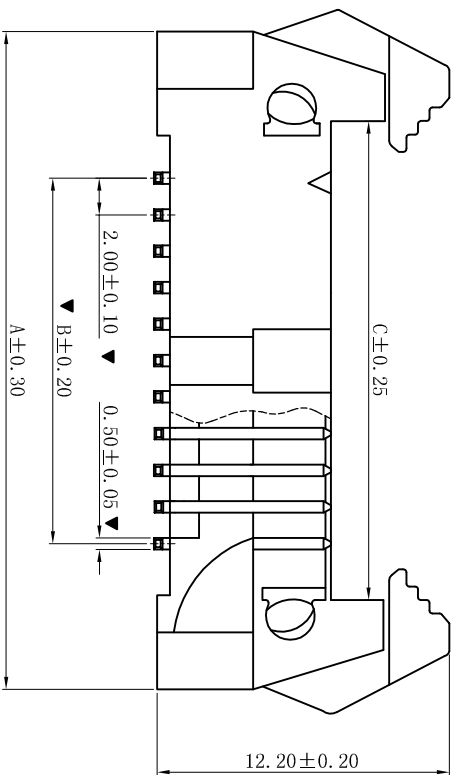

Poles	Dimensions (mm)		
	A	B	C
2x05	23.86	8.00	14.43
2x08	29.86	14.00	20.43
2x10	33.86	18.00	24.43
2x12	37.86	22.00	28.43
2x13	39.86	24.00	30.43
2x15	43.86	28.00	34.43
2x17	47.86	32.00	38.43
2x20	53.86	38.00	44.43
2x22	57.86	42.00	48.43
2x25	63.86	48.00	54.43

D	更新图画	2019-06-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
1	DESCRPTION	DATE	APPRO.

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.05
ANGLE: ±1°	
绘图/DR	陈雄军
审核/CHECK	胡进
批准/APPRO	胡进
日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法 Projection: MM
单位 Unit: MM
比例/Scale: 1:1
大小/Size: A4
页码/SHEET: 1/1
版本/Rev: D

品名 (PART NAME): 2.00mm SMT 180° 牛角 Wafer Connector Series
料号 (PART NO): WLJ2010SV-2xNP
状态码: C