
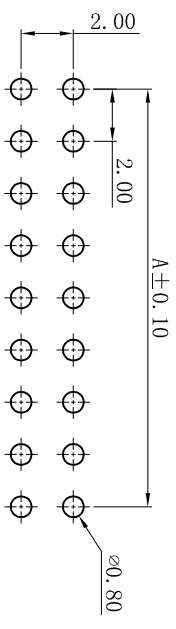
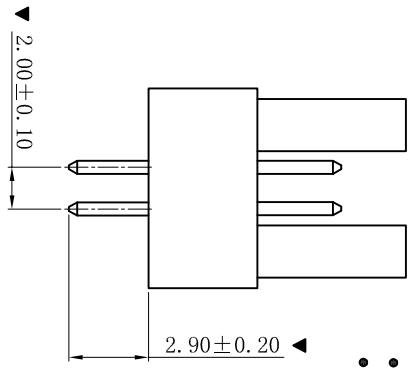
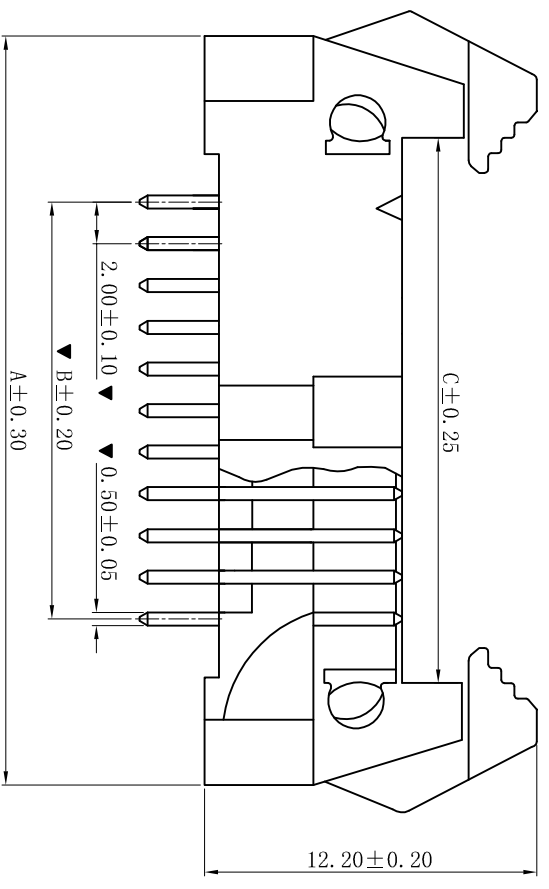


RoHS

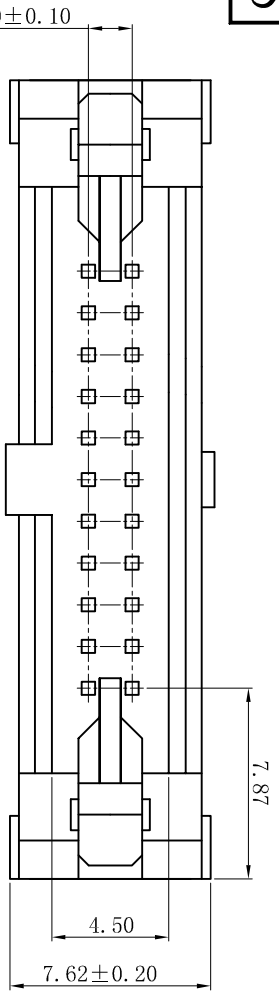

P. C. B LAYOUT

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
 - Contact resistance: 20m Ω max
- WAFER**
- Part No. : WLJ2010V-2xNP
 - Poles : 10-50P
 - Housing Material: PBT UL94V-0 Black
 - Pin Material: Brass
 - Contact Area Plating: Gold-flash
 - The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)		
	A	B	C
2x05	23.86	8.00	14.43
2x08	29.86	14.00	20.43
2x10	33.86	18.00	24.43
2x12	37.86	22.00	28.43
2x13	39.86	24.00	30.43
2x15	43.86	28.00	34.43
2x17	47.86	32.00	38.43
2x20	53.86	38.00	44.43
2x22	57.86	42.00	48.43
2x25	63.86	48.00	54.43

XYDZ[®] 东莞市祥运连接器有限公司
 DongGuan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.05
绘图/DR	P.P. Chau
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

投影法 Projection		品名 (PART NAME)	2.00mm 180 $^{\circ}$ 牛角 Wafer
单位 Unit	MM	料号 (PART NO)	WLJ2010V-2xNP
比例/Scale	1:1	状态码	C
大小/Size	A4		
页码/Sheet	1/1		
版本/Rev	D		

更新图面	2019-06-03	P.P. Chau
修订版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明 DESCRIPTION	日期 DATE	承认 APPRO.
版次 REV.	1	