
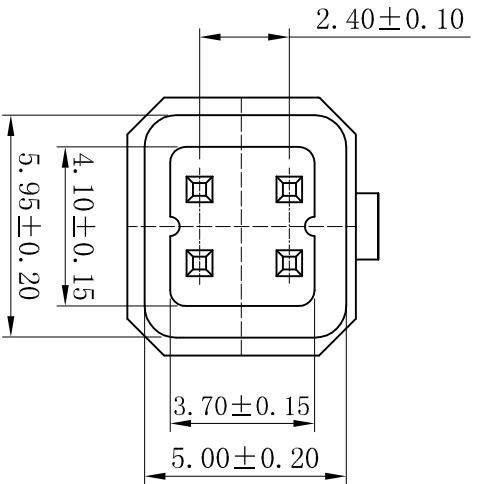
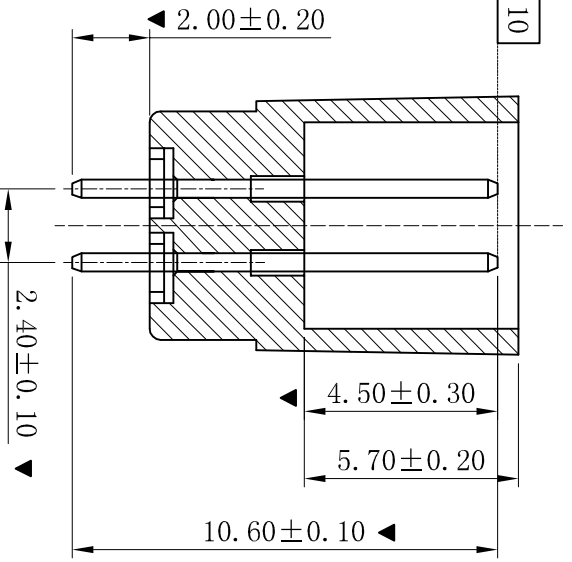
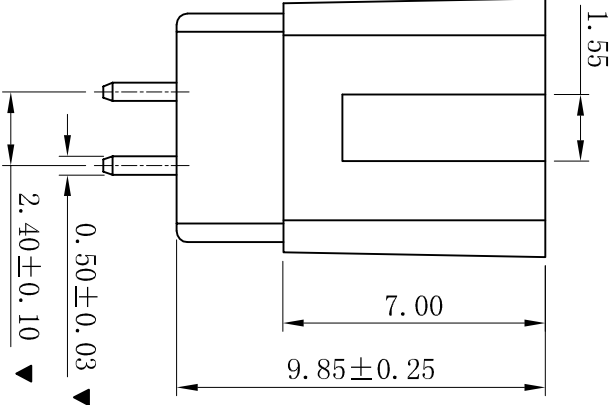


RoHS

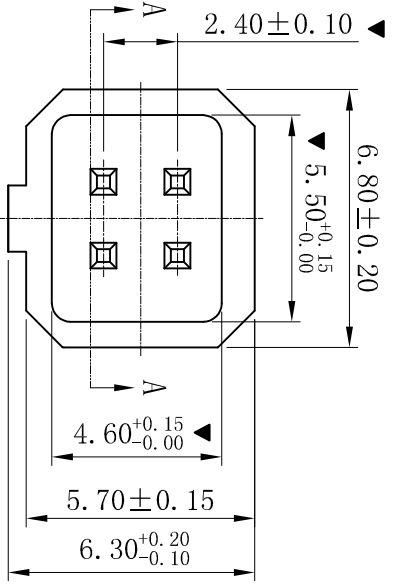

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
  - Current rating: 2A, AC, DC
  - Withstanding Voltage: 1000V AC/minute
  - Insulation resistance: 800MΩ min
  - Temperature range: -25° C~+85° C
  - Contact resistance: 20mΩ max
- WAFER
- Part No. : W2401V-2x02P
  - Housing Material: PBT UL94V-0 Black
  - Pin Material: Brass
  - Contact Area Plating: Gold-Flash
  - The Dimension Marked “▼” Must Be Recorded
  - PIN L=0.50x10.60

SECTION: A-A

E	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
D	配插太紧，修订内腔尺寸	2018-03-09	Jeff	ANGLE: ±1°	
C	修订版本	2015-11-04	陈雄军	绘图/DR	陈雄军
B	变更PIN针长度由11.3变更为10.6，针打扁平	2015-03-25	陈雄军	审核/CHECK	陈雄军
A	新版本	2011-05-24	陈雄军	核准/APPRO	胡进
H	版次 REV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.	日期/DATE
1	1	2	3	4	5

**XYDZ® 东莞市祥运连接器有限公司**  
DongGuan XiangYun Connectors CO., Ltd

投影法  
Projection  
单位 Unit  
MM

品名  
(PART NAME)  
方四P 2.40mm 180° Wafer  
Connector Series

料号  
(PART NO)  
W2401V-2x02P

状态码  
C

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----