



RoHS

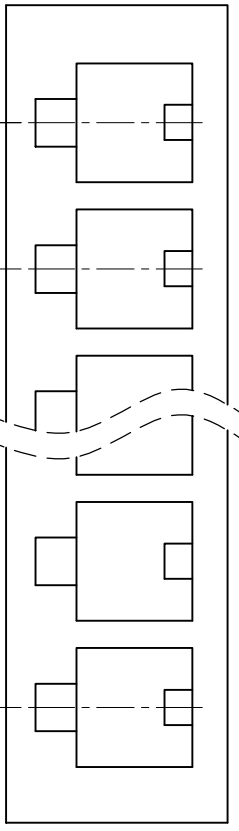

▼ 2.50 ± 0.10
▼ $A \pm 0.20$

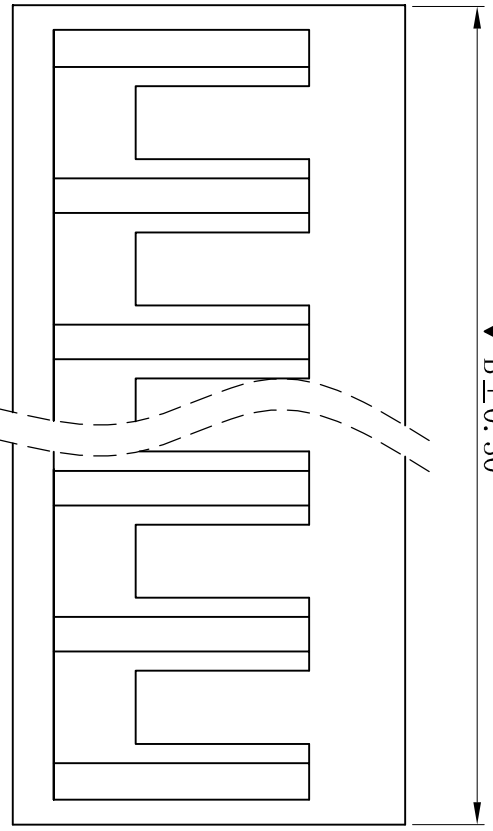

▼ $B \pm 0.30$

▼ 6.70 ± 0.20

▼ 3.70

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C

■ HOUSING

- Part No.: H2507-NP
- Poles : 02-16P
- Housing Material: PA66 UL94V-0
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)	
	A	B
02	2.50	6.50
03	5.00	9.00
04	7.50	11.50
05	10.00	14.00
06	12.50	16.50
07	15.00	19.00
08	17.50	21.50
09	20.00	24.00
10	22.50	26.50
11	25.00	29.00
12	27.50	31.50
13	30.00	34.00
14	32.50	36.50
15	35.00	39.00
16	37.50	41.50

更新图面

修订版本

变更图宽格式内容

新版本

说明

DESCRIPTION

版次

REV.

一般公差
GENERAL TOLERANCE:
0±0.30
.0±0.25
.00±0.20
.000±0.05
ANGLE: ±1°

绘图/DR
审核/CHECK
核准/APPRO

日期/DATE

日期/DATE

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors Co., Ltd

投影法
Projection
单位 Unit
MM

比例/Scale
1:1

页码/SHEET
版本/Rev
D

品名
(PART NAME)
SCN 2.50mm Vertical Housing
Connector Series

料号
(PART NO)
H2507-NP
状态码
C