


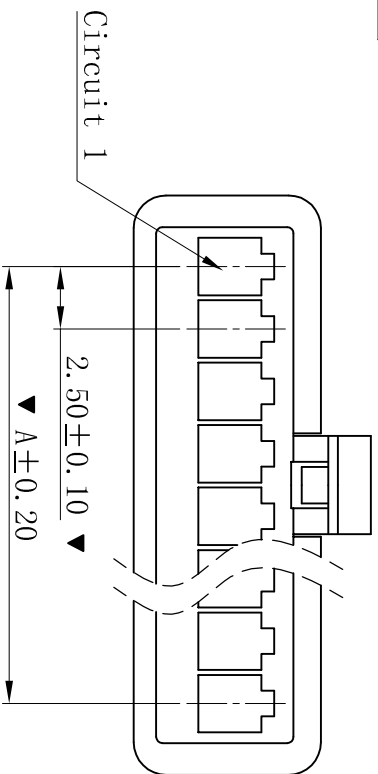


RoHS

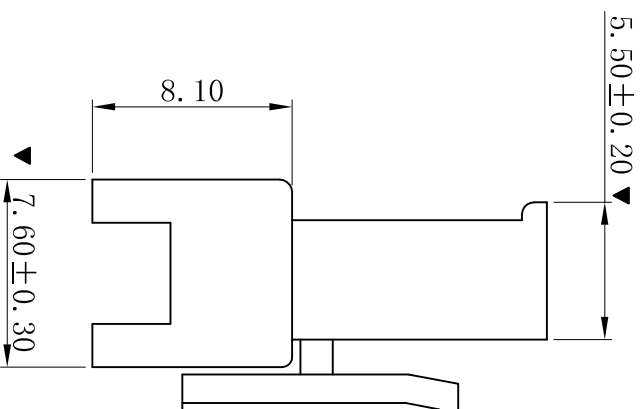

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance: 500MΩ min
 - Temperature range: -25° C~+85° C
- HOUSING
- Part No.: H2512-NP-V0
 - Poles : 02-12P
 - Housing Material: PA66 UL94V-0
- The Dimension Marked “▼” Must Be Recorded

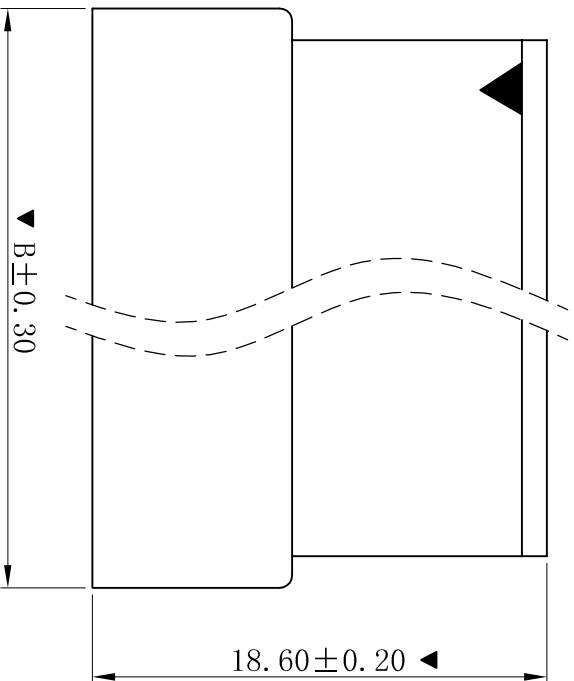

Poles	Dimensions (mm)	
	A	B
02	2.50	8.20
03	5.00	10.70
04	7.50	13.20
05	10.00	15.70
06	12.50	18.20
07	15.00	20.70
08	17.50	23.20
09	20.00	25.70
10	22.50	28.20
11	25.00	30.70
12	27.50	33.20

D	更新图面	2019-06-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
1	版次	REV.	DESCRIPTION

一般公差	0±0.30
GENERAL TOLERANCE:	.0±0.25
	.00±0.20
	.000±0.05
角度	ANGLE: ±1°
绘图/DR	陈雄军
审核/CHECK	陈雄军
核准/APPRO	胡进
日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法
Projection
单位 Unit
MM

比例/Scale
1:1

大小/Size
A4

页码/Sheet
1/1

版本/Rev
D

品名
(PART NAME)
SM 2.50mm Female Housing
Connector Series

料号
(PART NO)
H2512-NP-V0

状态码
C