
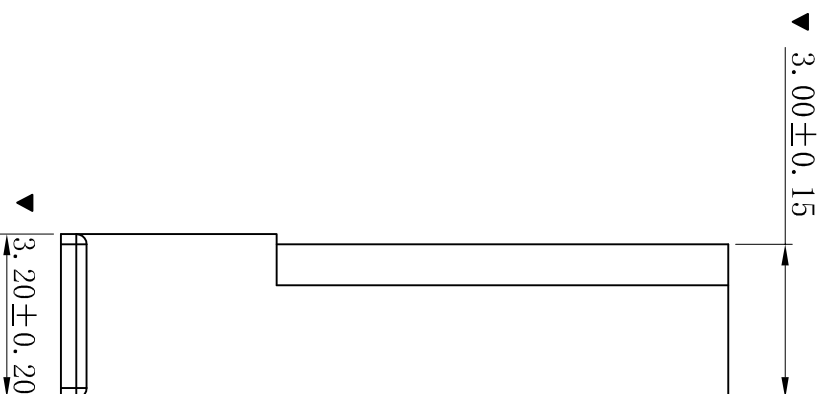
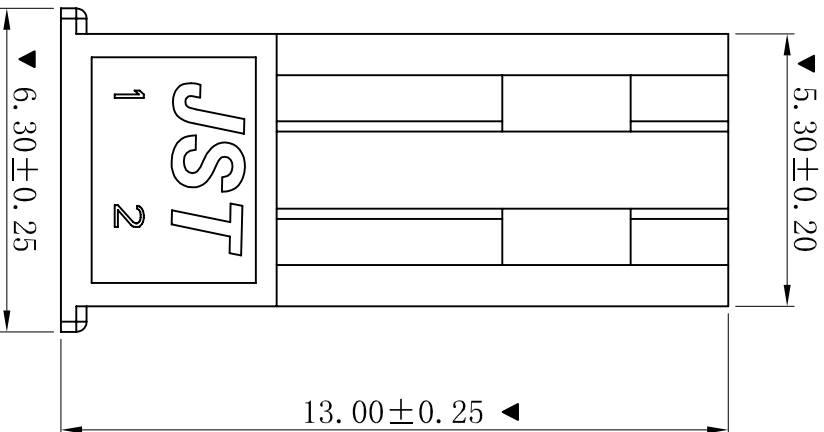


RoHS

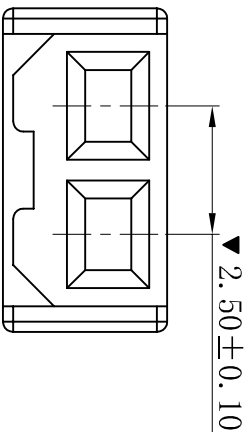


■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 500MΩ min
- Temperature range: -25 °C~+85 °C

■ HOUSING

- Part No. : H2513-02P-XX
- Housing Material : PA66 UL94V-2
- The Dimension Marked “▼” Must Be Recorded
- H2513-02P-RD (Red)
- H2513-02P-WI (White)
- H2513-02P-BK (Black)

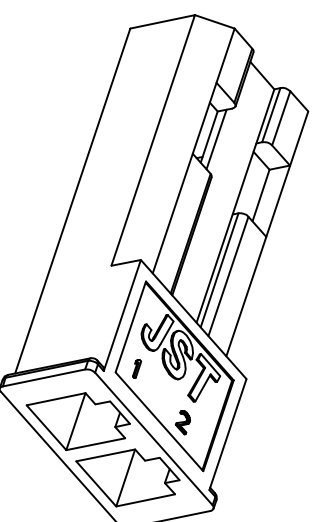

D	更新图面	2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
C	修订版本	2015-11-04	陈雄军	绘图/DR	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军	审核/CHECK	陈雄军
A	新版本	2011-05-24	陈雄军	批准/APPRO	胡进
H	说明	日期	承认	日期/DATE	2019-06-03
1	版次	REV.	APPRO.		

<p>XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd</p>	
<p>投影法 Projection</p>	<p>品名 (PART NAME)</p> <p>SYP 2.50mm Male Housing Connector Series</p>
<p>单位 Unit MM</p> <p>比例/Scale 1:1</p> <p>大小/Size A4</p> <p>页码/SHEET 1/1</p> <p>版本/Rev D</p>	<p>料号 (PART NO)</p> <p>H2513-02P-XX</p>