
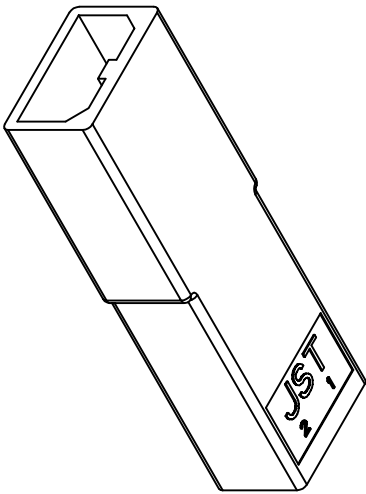
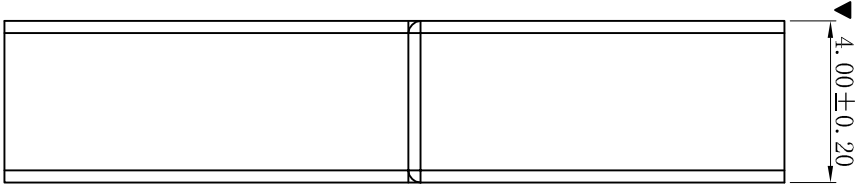


RoHS



■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 500MΩ min
- Temperature range: -25° C~+85° C

■ HOUSING

- Part No. : H2514-02P-XX
- Housing Material : PA66 UL94V-2
- The Dimension Marked “▼” Must Be Recorded
- H2514-02P-RD (Red)
- H2514-02P-WI (White)
- H2514-02P-BK (Black)

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.20 ANGLE: ±1°	投影法 Projection	品名 (PART NAME)	SYP 2.50mm Female Housing Connector Series	
修訂版本		2015-11-04	陈雄军	绘图/DR	陈雄军	单位 Unit	Dongguan XiangYun Connectors CO., Ltd		
变更图宽格式内容		2013-12-27	陈雄军	审核/CHECK	胡进	比例/Scale	XYPDZ® 东莞市祥运连接器有限公司		
新版本		2011-05-24	陈雄军	核准/APPRO	胡进	大小/Size	XiangYun Connectors CO., Ltd		
说明		日期 DATE:	承认 APPRO.	日期/DATE	2019-06-03	页码/SHEET	料号 (PART NO)		
版次 RRV.		1				版本/Rev	H2514-02P-XX		

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----