
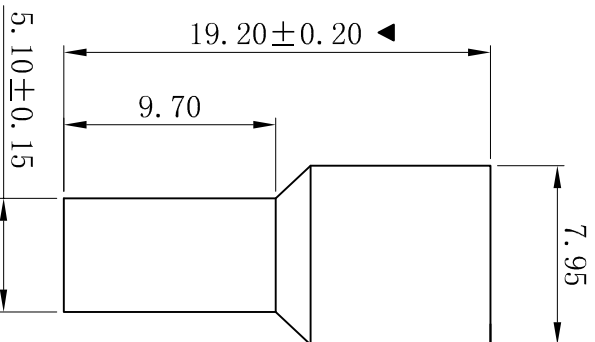
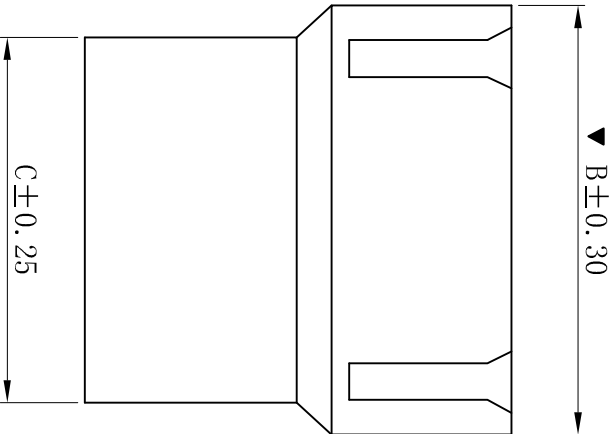


ROHS

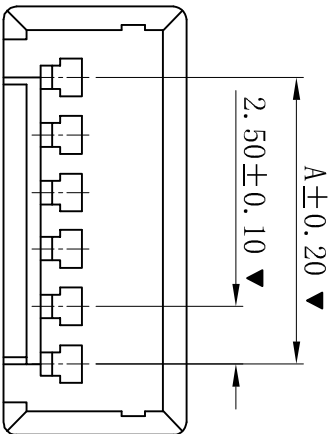

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance: 500MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max

- HOUSING
- Part No. : H2517-NP
 - Poles : 02-12P
 - Housing Material : PA66 UL94V-0
 - The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)		
	A	B	C
02	2.50	8.60	5.80
03	5.00	11.10	8.30
04	7.50	13.60	10.80
05	10.00	16.10	13.30
06	12.50	18.60	15.80
07	15.00	21.10	18.30
08	17.50	23.60	20.80
09	20.00	26.10	23.30
10	22.50	28.60	25.80
11	25.00	31.10	28.30
12	27.50	33.60	30.80

D	更新图面	2019-06-03	陈雄军	更新图面	2019-06-03	陈雄军	承认
C	修订版本	2015-11-04	陈雄军	变更图规格式内容	2013-12-27	陈雄军	承认
B	新版本	2011-05-24	陈雄军	说明	2011-05-24	陈雄军	承认
A	版次	RRV.	RRV.	说明	2011-05-24	陈雄军	承认

<p>XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd</p>		<p>投影法 Projection</p>		<p>品名 (PART NAME) 2540 2.50mm Female Housing Connector Series</p>	
<p>一般公差 GENERAL TOLERANCE: ANGLE: ±1°</p>		<p>审核/CHCK 核准/APPRO</p>		<p>料号 (PART NO) H2517-NP</p>	
<p>0±0.30 .0±0.25 .00±0.20 .000±0.05</p>		<p>绘图/DR 陈雄军</p>		<p>状态码 C</p>	
<p>日期/DATE 2019-06-03</p>		<p>胡进</p>		<p>版本号 D</p>	