
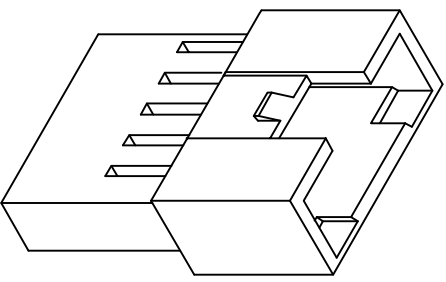
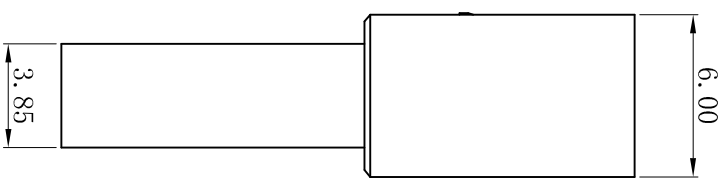
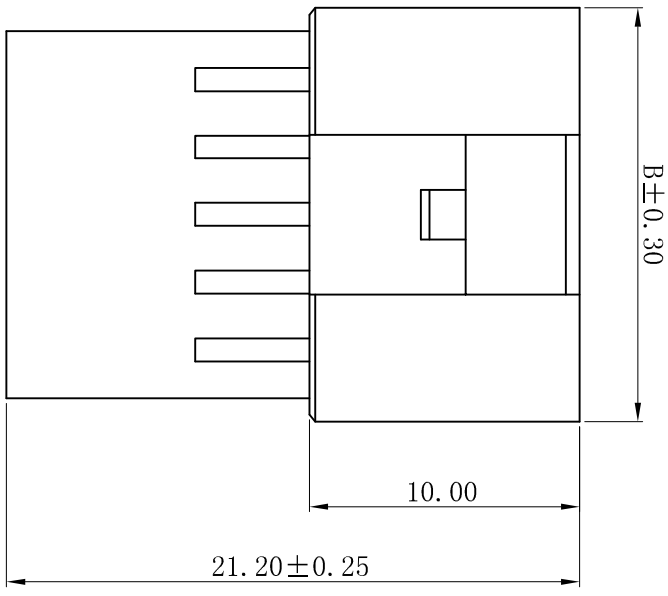


RoHS

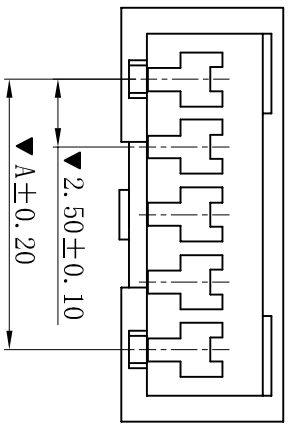

Poles	Dimension (mm)	
	A	B
02	2.50	7.88
03	5.00	10.38
04	7.50	12.88
05	10.00	15.38
06	12.50	17.88
07	15.00	20.38
08	17.50	22.88
09	20.00	25.38
10	22.50	27.88
11	25.00	30.38
12	27.50	32.88
13	30.00	35.38
14	32.50	37.88
15	35.00	40.38
16	37.50	42.88

- SPECIFICATIONS
 - Voltage rating: 500V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance: 500MΩ min
 - Temperature range: -25° C~+85° C
- HOUSING
 - Part No. : H2518F-NP
 - Poles : 02-16P
 - Housing Material: PA66 UL94V-0
 - The Dimension Marked “▼” Must Be Recorded

D	更新图面	2019-06-03	陈雄军	更新图面
C	修打版本	2015-11-04	陈雄军	修打版本
B	变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容
A	新版本	2011-05-24	陈雄军	新版本
H	说明	日期	承认	说明
1	DESCRPTION	DATE	APPRO.	REV.

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors Co., Ltd

品名 (PART NAME): YH 2.50mm Female Housing
Connector Series

料号 (PART NO): H2518F-NP

状态码: C

投影法 Projection	第一角
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/SHEET	1/1
版本/Rev	D

1 2 3 4 5 6 7 8 9 10