


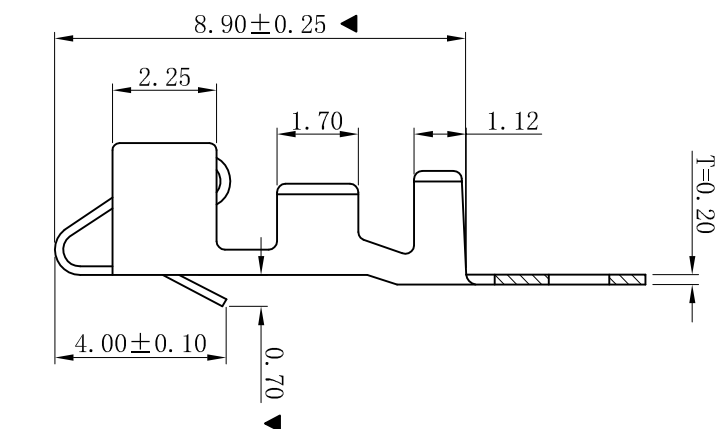


RoHS

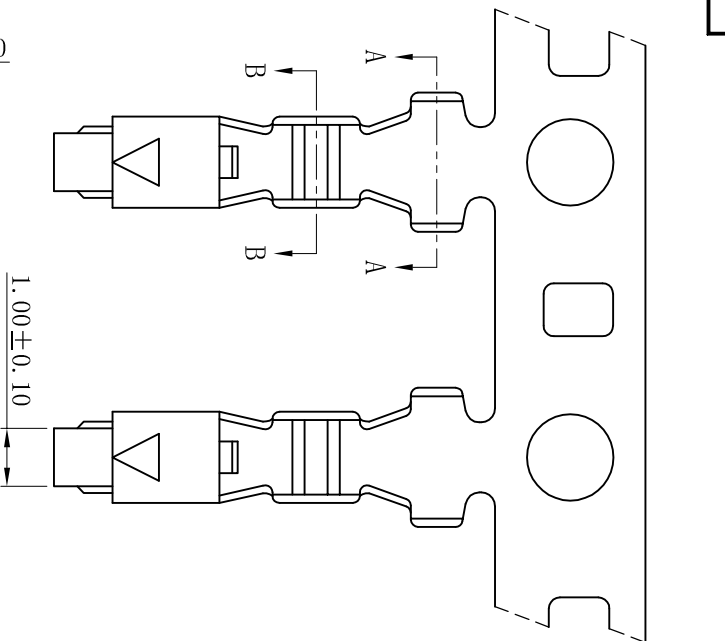

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- TERMINAL
- Part No.: T2516PT
 - Applicable wire: AWG#22-#28
 - Material: Phosphor Bronze
 - Finish: Tin Plated
 - The Dimension Marked “▼” Must Be Recorded

G

D

C

B

A

H

1

2

3

4

5

6

7

8

9

10

G

F

E

D

C

B

A

H

1

2

3

4

5

6

7

8

9

10

G

F

E

D

C

B

A

H

1

2

3

4

5

6

7

8

9

10

G

F

E

D

C

H

更新图面		2019-06-03		陈雄军		一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05		投影法 Projection		东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd	
修订版本		2015-11-04		陈雄军		绘图/DR		陈雄军		品名 (PART NAME)		NH 2.50mm Terminal	
变更图宽格式内容		2013-12-27		陈雄军		审核/CHECK		陈雄军		单位 Unit		MM	
新版本		2011-05-24		陈雄军		批准/APPRO		胡进		比例/Scale		1:1	
说明		日期 DATE:		承认 APPRO.		日期/DATE		2019-06-03		大小/Size		A4	
版次 REV.		1		1		描述/DESCRIPTION		1/1		页码/SHEET		1/1	
		2		2				版本/Rev		料号 (PART NO)		T2516PT	
		3		3						状态码		C	
		4		4									
		5		5									
		6		6									
		7		7									
		8		8									
		9		9									
		10		10									