

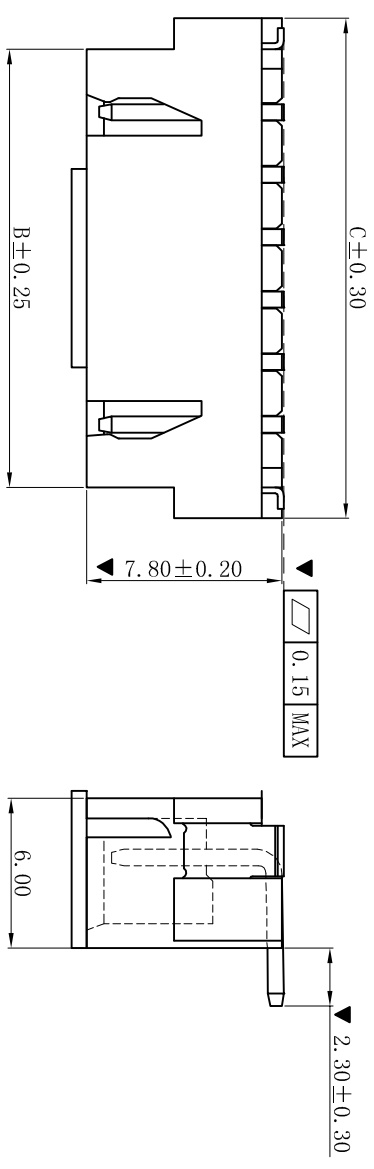


RoHS

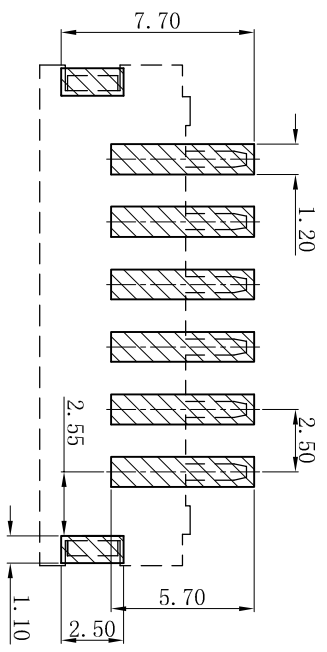

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25°C~+85°C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W2501SV-NP-JK
 - Poles : 02-16P
 - Housing Material: LCP UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

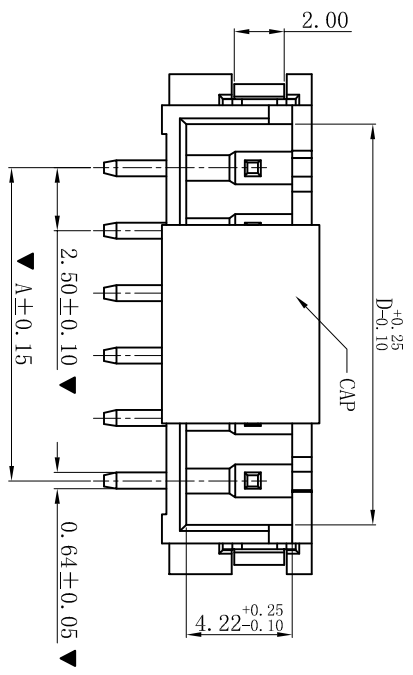

P.C.B. LAYOUT

Poles	Dimension (mm)			
	A	B	C	D
02	2.50	7.50	10.00	6.00
03	5.00	10.00	12.50	8.50
04	7.50	12.50	15.00	11.00
05	10.00	15.00	17.50	13.50
06	12.50	17.50	20.00	16.00
07	15.00	20.00	22.50	18.50
08	17.50	22.50	25.00	21.00
09	20.00	25.00	27.50	23.50
10	22.50	27.50	30.00	26.00
11	25.00	30.00	32.50	28.50
12	27.50	32.50	35.00	31.00
13	30.00	35.00	37.50	33.50
14	32.50	37.50	40.00	36.00
15	35.00	40.00	42.50	38.50
16	37.50	42.50	45.00	41.00

D	更新图面	2019-06-03	陈雄军	更新图面						
C	修订版本	2015-11-04	陈雄军	修订版本						
B	变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容						
A	新版本	2011-05-24	陈雄军	新版本						
H	版次 RRV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.						
1	1	2	3	4	5	6	7	8	9	10

公差	0±0.30
一般公差	.0±0.25
GENERAL TOLERANCE:	.00±0.20
	.000±0.05
角度	ANGLE: ±1°

绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connectors Co., Ltd

投影法
 Projection
 单位 Unit
 MM
 比例/Scale
 1:1
 大小/Size
 A4
 页码/SHEET
 1/1
 版本/Rev
 D

品名 (PART NAME)
 XH 2.50mm SWT 180° Wafer
 Connector Series

料号 (PART NO)
 W2501SV-NP-JK

状态码
 C