





RoHS

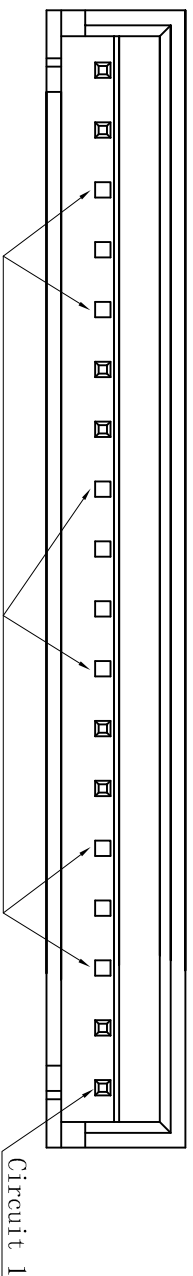

缺第3、4、5、8、9、10、11、14、15、16 PIN

Circuit 1

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER**
- Part No.: W2501V-18P-Q10P
 - Housing Material: PA66 UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked "▼" Must Be Recorded

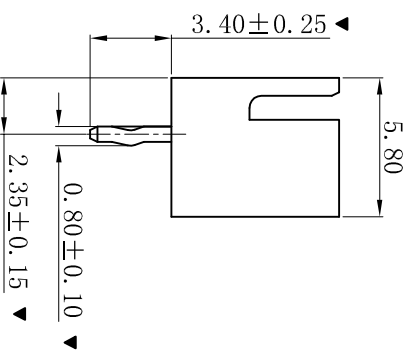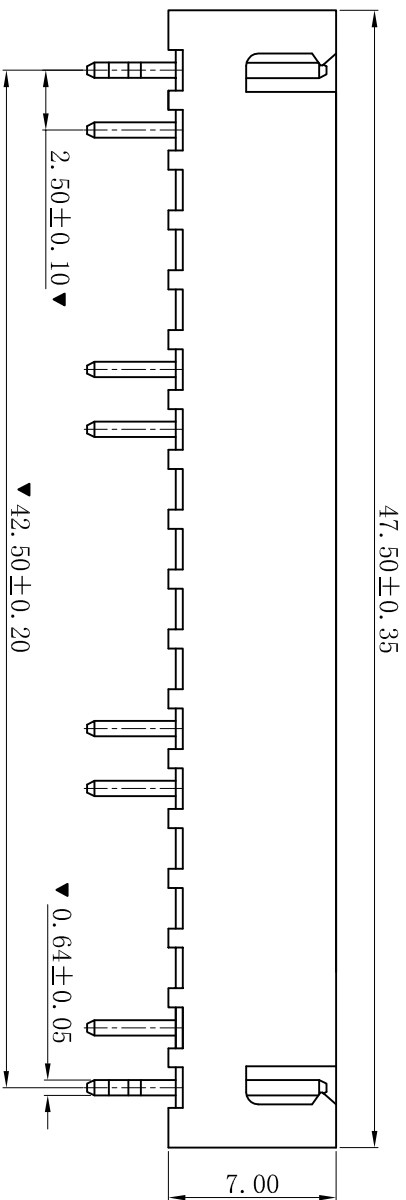

P. C. B. LAYOUT

D	更新图面	2019-06-03	P. C. B. LAYOUT
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
1	版次	DESCRIPTION	APPRO.
2	1	3	4
3	5	6	7
4	8	9	10

一般公差	0±0.30
GENERAL TOLERANCE:	.00±0.25
	.000±0.15
ANGLE: ±1°	

投影法	Connector's	XYDZ® 东莞市祥运连接器有限公司
单位	MM	Dongguan XiangYun Connector's CO., Ltd
比例/Scale	1:1	
大小/Size	A4	
页码/Sheet	1/1	
版本/Rev	C	

绘图/DR	P. C. B. LAYOUT	品名	XH 2.50mm 180° Wafer
审核/CHK	陈雄军	(PART NAME)	Connector Series
批准/APPRO	胡进	料号	W2501V-18P-Q10P
日期/DATE	2019-06-03	(PART NO)	
		状态码	C