
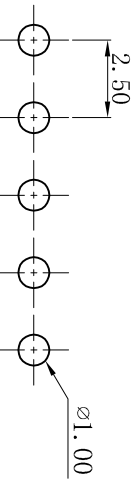
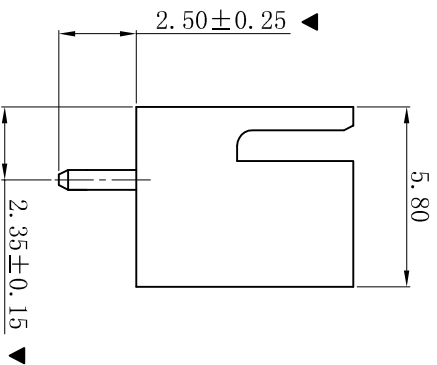
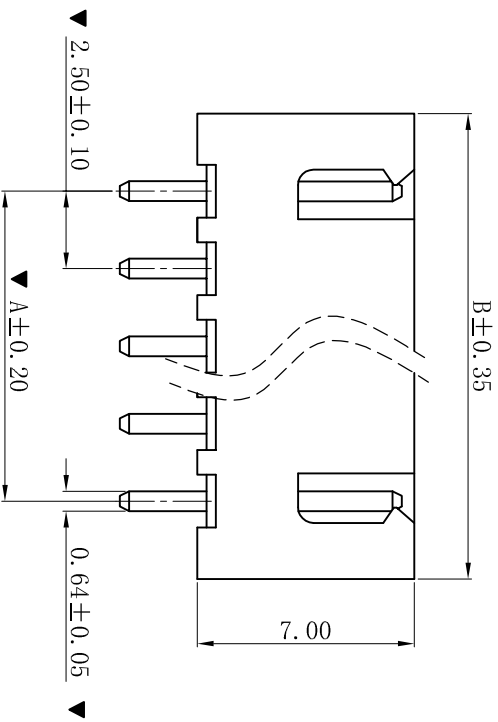



ROHS

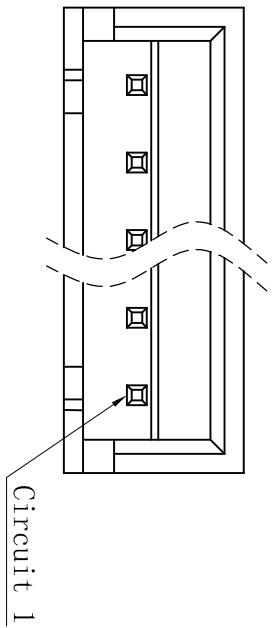

P. C. B. LAYOUT

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W2501V-NP-B-WL2.5
 - Poles : 02-20P
 - Housing Material: PA66 UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked "▼" Must Be Recorded

Poles	Dimension (mm)	
	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50
17	40.00	45.00
18	42.50	47.50
19	45.00	50.00
20	47.50	52.50

D	更新图面	2019-06-03	陈雄军	一般公差	0±0.30
C	修订版本	2015-11-04	陈雄军	GENERAL TOLERANCE:	.0±0.25
B	变更图宽格式内容	2013-12-27	陈雄军		.00±0.20
A	新版本	2011-05-24	陈雄军	ANGLE: ±1°	.000±0.05
H	说明	日期	承认	绘图/DR	陈雄军
1	版次	REV.	DESCRIPTION	审核/CHECK	陈雄军
2				批准/APPRO	胡进
3				日期/DATE	2019-06-03
4					
5					
6					
7					
8					
9					
10					

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法	第一角	品名	XH 2.50mm 180° Wafer
单位 Unit	MM	(PART NAME)	Connector Series
比例/Scale	1:1	料号	W2501V-NP-B-WL2.5
大小/SIZE	A4	(PART NO)	
页码/SHEET	1/1		状态码
版本/Rev	D		C