
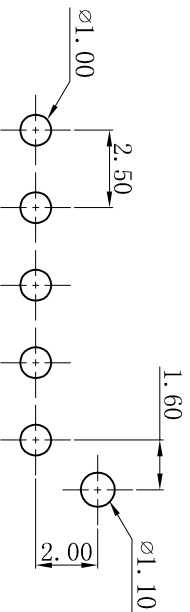
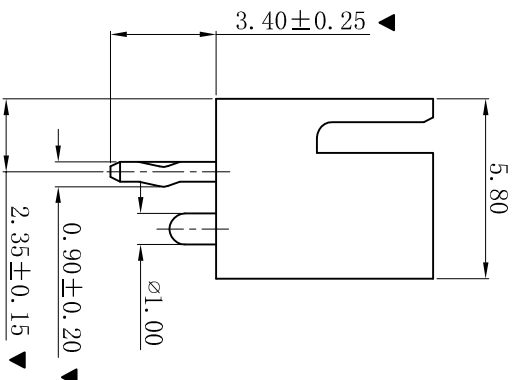
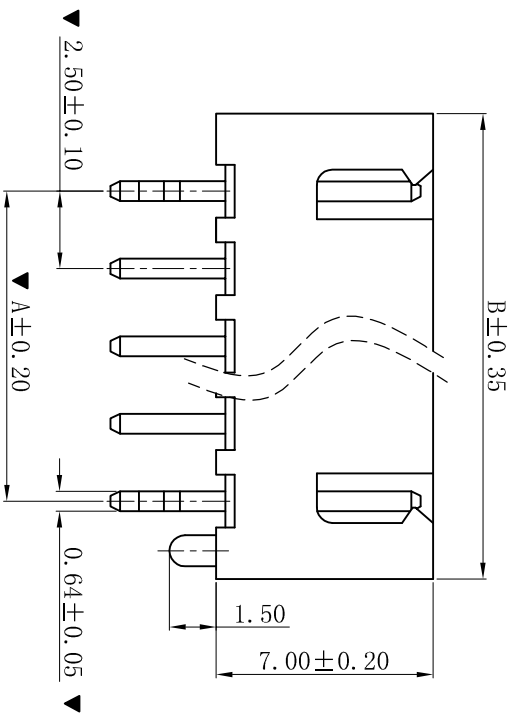


ROHS

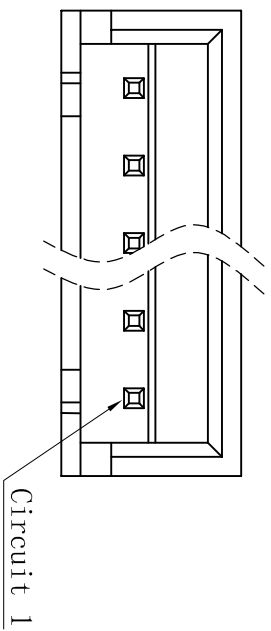

P. C. B. LAYOUT

- SPECIFICATIONS
  - Voltage rating: 250V AC, DC
  - Current rating: 3A, AC, DC
  - Withstanding Voltage: 1000V AC/minute
  - Insulation resistance: 1000MΩ min
  - Temperature range: -25° C~+85° C
  - Contact resistance: 20mΩ max
- WAFER
  - Part No.: W2501VD-NP
  - Poles : 02-20P
  - Housing Material: PA66 UL94V-0
  - Pin Material: Brass
  - Contact Area Plating: Tin-Plated
  - The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)	
	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50
17	40.00	45.00
18	42.50	47.50
19	45.00	50.00
20	47.50	52.50

更新图面		2019-06-03	陈雄军	一般公差	0±0.30
修订版本		2015-11-04	陈雄军	GENERAL TOLERANCE:	.0±0.25
变更图宽格式内容		2013-12-27	陈雄军		.00±0.20
新版本		2011-05-24	陈雄军	ANGLE: ±1°	.000±0.05
说明		日期	承认		
DESCRIPTION		DATE:	APPRO.		

**XYDZ® 东莞市祥运连接器有限公司**  
Dongguan XiangYun Connectors CO., Ltd

投影法 Projection	第一角投影	品名 (PART NAME)	XH 2.50mm 180° Wafer
单位 Unit	MM	料号 (PART NO)	W2501VD-NP
比例/Scale	1:1	版本号	C
大小/Size	A4		
页码/SHEET	1/1		
版本/Rev	D		