

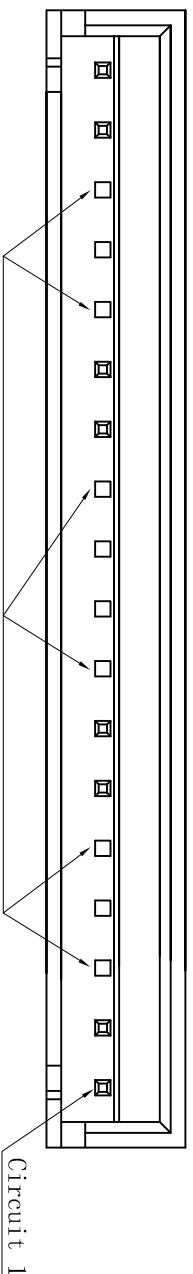



RoHS

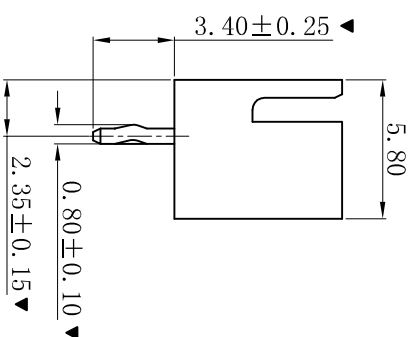

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER**
- Part No.: W2501VFK-18P-Q10P
 - Housing Material: PA66 UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked "▼" Must Be Recorded

47.50±0.35

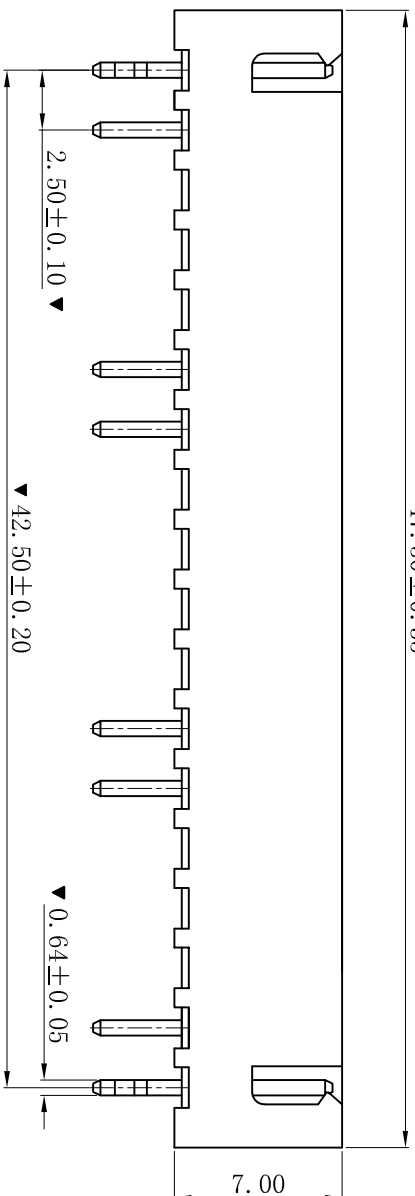

P. C. B. LAYOUT

| | | | | | |
|---|------------|-------------------|-------------|----------------------------|--------------------------------|
| D | 更新图面 | 2019-06-03 | P. C. Duaw | 一般公差 GENERAL TOLERANCE: | 0±0.30 -0±0.25 .000±0.20 |
| C | 修订版本 | 2015-11-04 | 陈雄军 | ANGLE: ±1° | |
| B | 变更图宽格式内容 | 2013-12-27 | 陈雄军 | 绘图/DR | P. C. Duaw |
| A | 新版本 | 2011-05-24 | 陈雄军 | 审核/CHKC | 陈雄军 |
| H | 版次 REV. | 说明 DESCRIPTION | 日期 DATE: | 批准/APPRO | 胡进 |
| | 1 | | 5 | 日期/DATE | 2019-06-03 |

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

| | | | | | |
|-------------------|--------------------------|----------|---------|----------|--------|
| 投影法 Projection | 单位 Unit | 比例/Scale | 大小/Size | 页码/Sheet | 版本/Rev |
| 第一角法 | MM | 1:1 | A4 | 1/1 | C |
| 品名 (PART NAME) | XH 2.50mm 180° 反K脚 Wafer | | | | |
| 料号 (PART NO) | W2501VFK-18P-Q10P | | | | |
| 状态码 | C | | | | |