
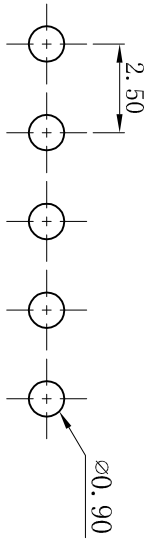
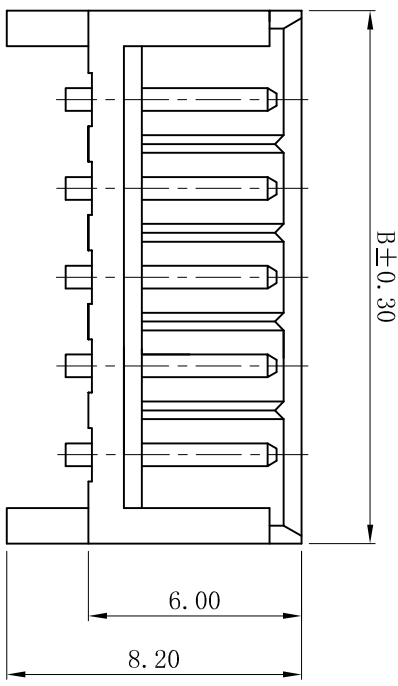


ROHS

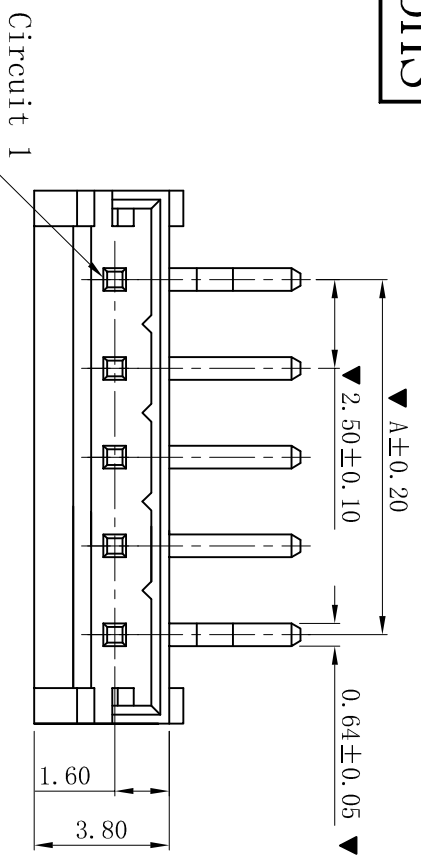

P. C. B. LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C +85° C
 - Contact resistance: 20mΩ max

- WAFER
- Part No. : W2503R-NP
 - Poles : 02-15P
 - Housing Material: PA66 UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)	
	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.05
绘图/DR	P.C. Duan
审核/CHECK	陈雄军
日期/DATE	2019-06-03

投影法 Projection	第一角投影
单位 Unit	MM
比例/Scale	1:1
大小/SIZE	A4
页码/SHEET	1/1
版本/Rev	D

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

D	更新图面	2019-06-03	P.C. Duan
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	版次 REV.		

1	说明 DESCRIPTION	日期 DATE	承认 APPRO.
---	-------------------	------------	--------------

6	日期/DATE	2019-06-03
---	---------	------------

7	料号 (PART NO)	W2503R-NP
---	-----------------	-----------

8	品名 (PART NAME)	EH 2.50mm 90° Wafer Connector Series	
9	料号 (PART NO)	W2503R-NP	状态码 C