
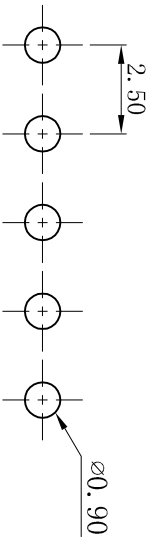
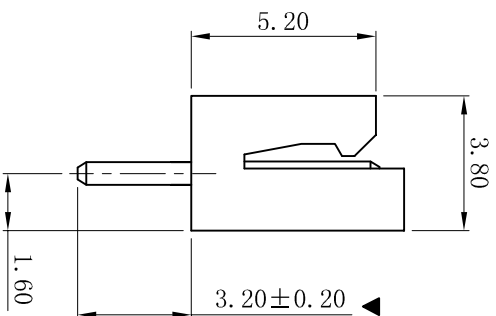
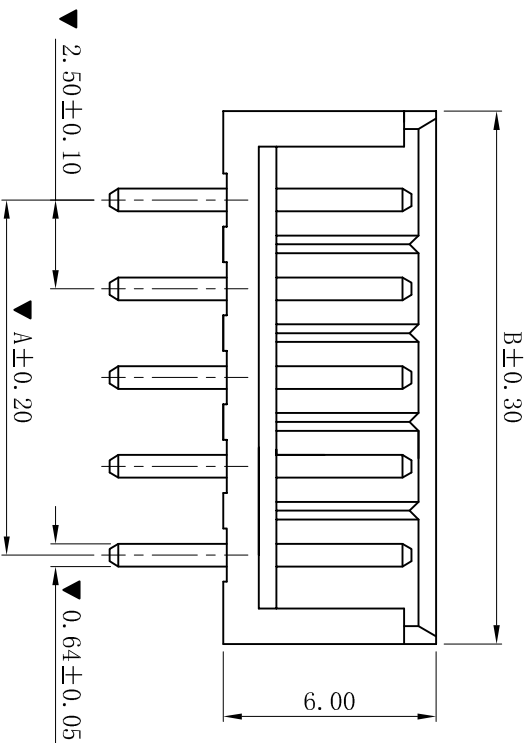


ROHS

Circuit 1

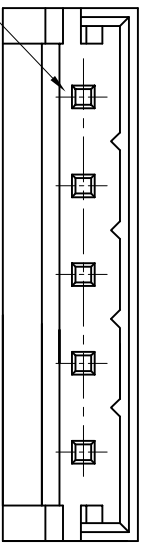

P.C.B. LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W2503V-NP-B
- Poles : 02-15P
- Housing Material: PA66 UL94V-0
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)	
	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00

D	更新图面	2019-06-03	陈雄军	更新图面	2019-06-03	陈雄军	0±0.30 .0±0.25 .00±0.20 .000±0.05	一般公差 GENERAL TOLERANCE: ANGLE: ±1°
C	修打版本	2015-11-04	陈雄军	修打版本	2015-11-04	陈雄军		
B	变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容	2013-12-27	陈雄军		
A	新版本	2011-05-24	陈雄军	新版本	2011-05-24	陈雄军		
H	版次 REV.	1	说明 DESCRIPTION	日期 DATE	承认 APPRO.	日期 DATE	审核/CHKC 核准/APPRO	日期/DATE

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

投影法
单位 Unit: MM
比例/Scale: 1:1
大小/Size: A4
页码/Sheet: 1/1
版本/Rev: D

品名 (PART NAME): EH 2.50mm 180° Wafer Connector Series
料号 (PART NO): W2503V-NP-B
状态码: C