
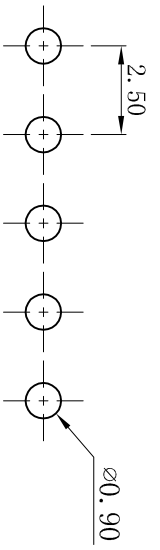
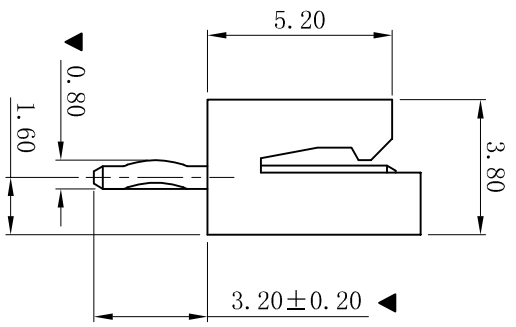
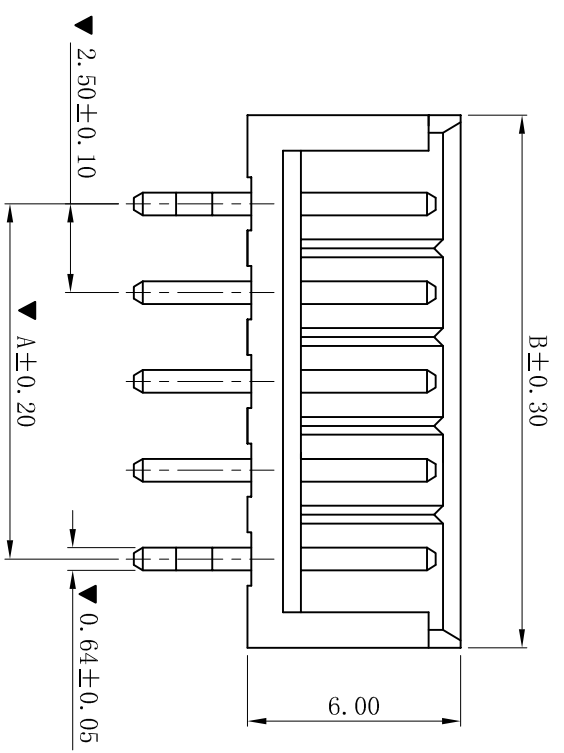


RoHS

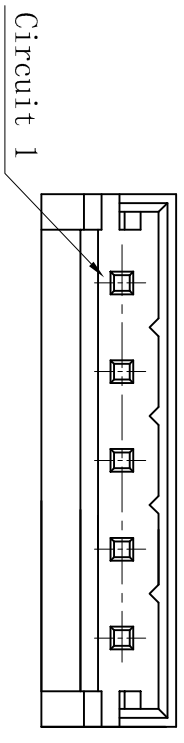

P.C.B. LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 3A, AC, DC
 - Withstanding Voltage: 800V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W2503V-NP
 - Poles : 02-15P
 - Housing Material: PA66 UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

Poles	Dimension (mm)	
	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00

更新图面		2019-06-03	陈雄军	一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .000±0.20 ANGLE: ±1°		投影法 Projection MM		品名 (PART NAME) EH 2.50mm 180° Wafer Connector Series		料号 (PART NO) W2503V-NP	状态码 C
修打版本		2015-11-04	陈雄军	绘图/DR 审核/CHECK 核准/APPRO		单位 Unit 比例/Scale 大小/Size 页码/SHEET 版本/Rev		东莞市祥运连接器有限公司 DongGuan XiangYun Connectors CO., Ltd			
变更图宽格式内容		2013-12-27	陈雄军	ANGLE: ±1°		MM					
新版本		2011-05-24	陈雄军			1:1					
说明		日期	承认			A4					
DESCRPTION		DATE	APPRO.			1/1					
版次						D					
REV.											