



ROHS

B ± 0.30

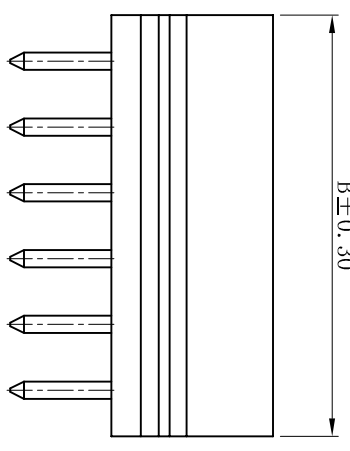


▼ 1.00 ± 0.05

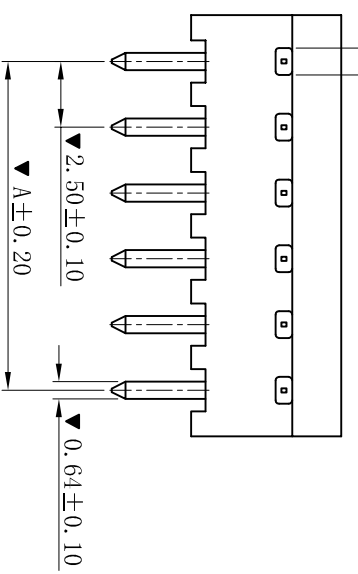

∅0.95

P. C. B LAYOUT

3.50 ± 0.20

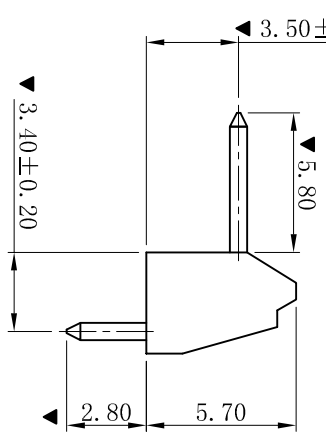

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 500MΩ min
- Temperature range: -25° C ~ +85° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W2516R-NP
- Poles : 02-25P
- Housing Material: PA66 UL94V-0
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)	
	A	B
02	2.50	5.00
03	5.00	7.50
04	7.50	10.00
05	10.00	12.50
06	12.50	15.00
07	15.00	17.50
08	17.50	20.00
09	20.00	22.50
10	22.50	25.00
11	25.00	27.50
12	27.50	30.00
13	30.00	32.50
14	32.50	35.00
15	35.00	37.50
16	37.50	40.00
17	40.00	42.50
18	42.50	45.00
19	45.00	47.50
20	47.50	50.00
21	50.00	52.50
22	52.50	55.00
23	55.00	57.50
24	57.50	60.00
25	60.00	62.50

XYDZ® 东莞市祥运连接器有限公司
 Dongguan XiangYun Connector's CO., Ltd

一般公差 GENERAL TOLERANCE:	0 ± 0.30 .0 ± 0.25 .00 ± 0.20 .000 ± 0.05
ANGLE: ± 1°	

更新图面	2019-06-03	陈雄军
修订版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明	日期	承认
DESCRIPTION	DATE:	APPRO.

D	更新图面	2019-06-03	陈雄军
C	修订版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
H	说明	日期	承认
H	版次	DESCRIPTION	DATE:
H	REV.		

投影法
Projection

单位 Unit
Unit

比例/Scale
Scale

大小/Size
Size

页码/Sheet
Sheet

版本/Rev
Rev

品名
(PART NAME)

料号
(PART NO)

NH 2.50mm 90° Wafer
Connector Series

W2516R-NP

状态码
Code

C