
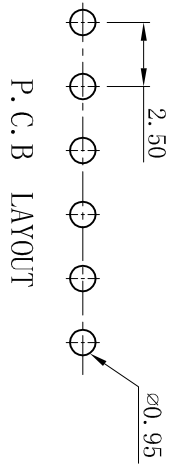
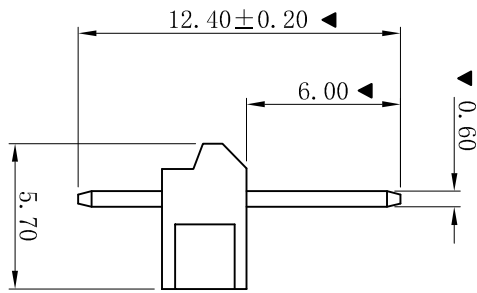
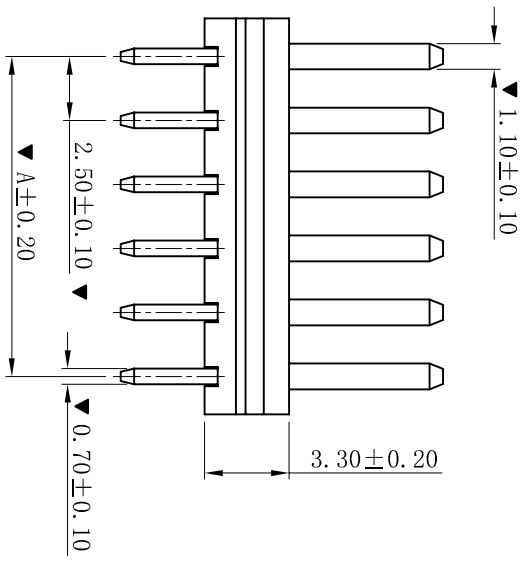


ROHS

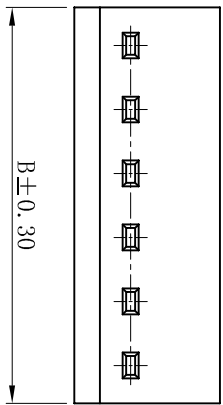

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 500MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max
- WAFER**
- Part No. : W2516V-NP
 - Poles : 02-25P
 - Housing Material : PA66 UL94V-0
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

| Poles | Dimensions (mm) | |
|-------|-----------------|-------|
| | A | B |
| 02 | 2.50 | 5.00 |
| 03 | 5.00 | 7.50 |
| 04 | 7.50 | 10.00 |
| 05 | 10.00 | 12.50 |
| 06 | 12.50 | 15.00 |
| 07 | 15.00 | 17.50 |
| 08 | 17.50 | 20.00 |
| 09 | 20.00 | 22.50 |
| 10 | 22.50 | 25.00 |
| 11 | 25.00 | 27.50 |
| 12 | 27.50 | 30.00 |
| 13 | 30.00 | 32.50 |
| 14 | 32.50 | 35.00 |
| 15 | 35.00 | 37.50 |
| 16 | 37.50 | 40.00 |
| 17 | 40.00 | 42.50 |
| 18 | 42.50 | 45.00 |
| 19 | 45.00 | 47.50 |
| 20 | 47.50 | 50.00 |
| 21 | 50.00 | 52.50 |
| 22 | 52.50 | 55.00 |
| 23 | 55.00 | 57.50 |
| 24 | 57.50 | 60.00 |
| 25 | 60.00 | 62.50 |

P.C.B LAYOUT

| | | | | | | | | | | | |
|-------------------|--|------------|--------------|--|--|----------------------------------|--|---|--|------------------------------|--|
| 更新图面 | | 2019-06-03 | 陈雄军 | 一般公差 GENERAL TOLERANCE: 0±0.30 .0±0.25 .00±0.20 .000±0.05 ANGLE: ±1° | | 投影法 Projection Connector's | | 品名 (PART NAME) NH 2.50mm 180° Wafer Connector Series | | 料号 (PART NO) W2516V-NP | |
| 修订版本 | | 2015-11-04 | 陈雄军 | 绘图/DR 陈雄军 | | 单位 Unit MM | | 大小/Scale 1:1 | | 状态码 C | |
| 变更图宽格式内容 | | 2013-12-27 | 陈雄军 | 审核/CHECK 陈雄军 | | 比例/Scale 1:1 | | 大小/Size A4 | | | |
| 新版本 | | 2011-05-24 | 陈雄军 | 批准/APPRO 胡进 | | 页码/SHEET 1/1 | | 大小/Size 1/1 | | | |
| 说明 DESCRIPTION | | 日期 DATE | 承认 APPRO. | 日期/DATE | | 页码/SHEET 版本/Rev | | | | | |
| 1 | | 2 | | 3 | | 4 | | 5 | | 6 | |
| 7 | | 8 | | 9 | | 10 | | | | | |

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connector's CO., Ltd