



RoHS

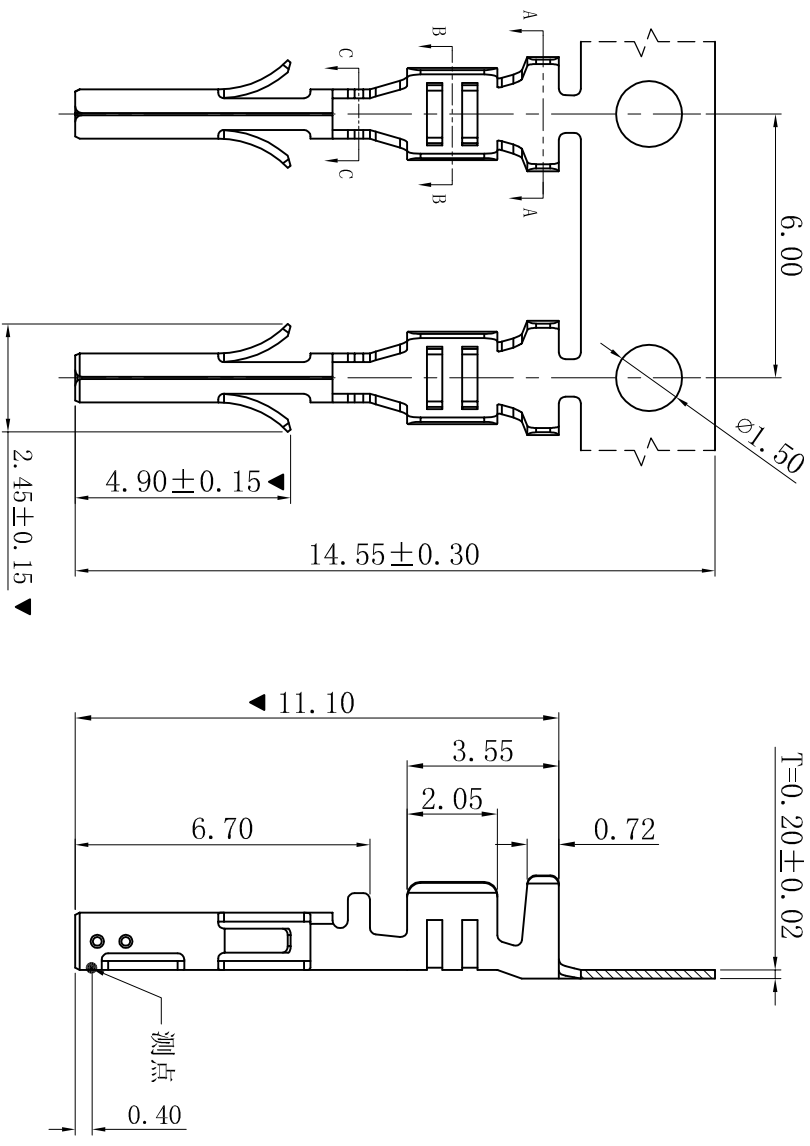


- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Temperature range: -25 °C~+85° C
 - Contact resistance: 20mΩ max


- TERMINAL
- Part No.: T3030PT-SW
 - Applicable wire: AWG#20-#24
 - Material: Phosphor Bronze
 - Finish: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded



SECTION: A-A



SECTION: B-B



SECTION: C-C

更新图面		2019-06-03	PPZ, Duwan	一般公差 GENERAL TOLERANCE: ANGLE: ±1°		0±0.30 .0±0.25 .00±0.20 .000±0.05	XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd Connectors		投影法 Projection 单位 Unit MM 比例/Scale 1:1 大小/Size A4 页码/Sheet 1/1 版本/Rev B	
新版本		2019-01-23	PPZ, Duwan	审核/CHECK		陈雄军	品名 (PART NAME)		Molex 3.00mm Female Terminal Connector Series	
说明 DESCRIPTION		日期 DATE	承认 APPRO.	日期/DATE		胡进	料号 (PART NO)		T3030PT-SW	
版次 REV.		1					状态码		C	