




RoHS

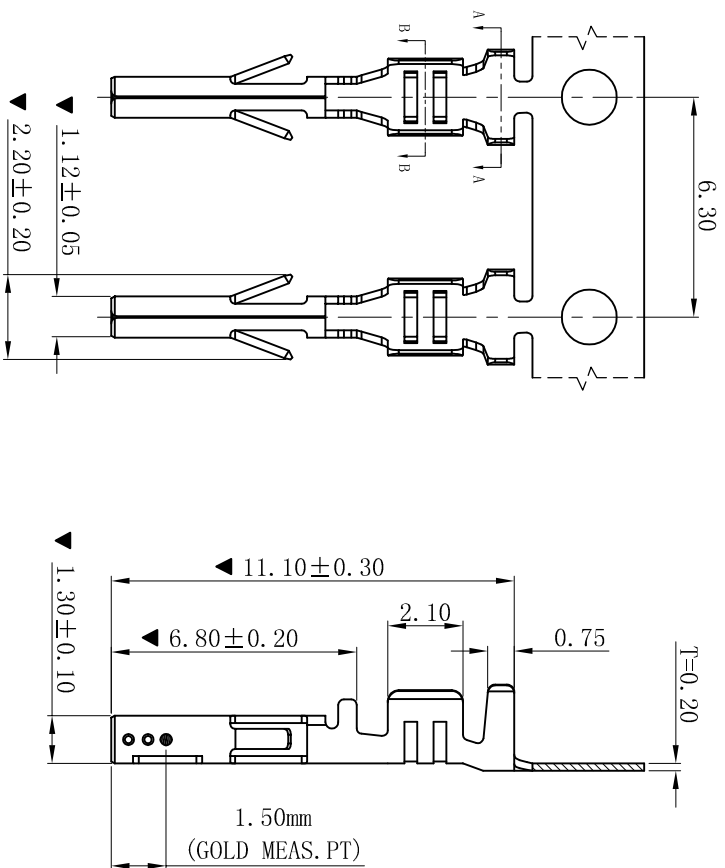

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Temperature range: -25°C ~ +85°C
 - Contact resistance: 20mΩ max
- TERMINAL
- Part No.: T3030PX
 - Applicable wire: AWG#24-#28
 - Material: Phosphor Bronze
 - Contact Area: Selective Gold or Matte Tin Plating Thickness Min;
 - Under Plating: Nickel Plating 30u" Thickness Min Overall.
 - The Dimension Marked "▼" Must Be Recorded

T 3030 X X
Terminal

3.00mm Pitch Series

Terminal Material

- B: Brass
- P: Phosphor Bronze
- C: Copper alloy

CONTACT FINISH

- T: Tin Plated 80u" Min
- G: Gold flash
- G3: 3u" MIN GOLD
- G10: 10u" MIN GOLD
- G15: 15u" MIN GOLD
- G30: 30u" MIN GOLD

SECTION: A-A

SECTION: B-B

D	更新图面	2019-06-03	陈雄军
C	修打版本	2015-11-04	陈雄军
B	变更图宽格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军
版次	说明	日期	承认
REV.	DESCRIPTION	DATE	APPRO.
1			
2			
3			
4			
5			

一般公差	0±0.30
GENERAL TOLERANCE:	.0±0.25
	.00±0.20
	.000±0.05
ANGLE: ±1°	
绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

<p>XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd</p>	
投影法 Projection	品名 (PART NAME)
单位 Unit	Molex 3.00mm Female Terminal Connector Series
比例/Scale 1:1	料号 (PART NO)
大小/Size A4	T3030PX
页码/Sheet 1/1	状态码 C
版本/Rev D	