
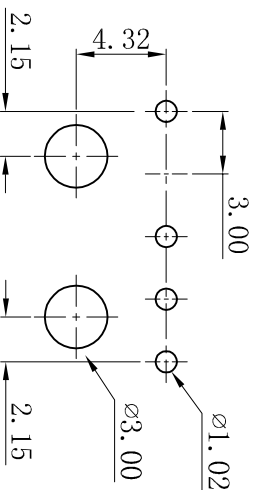
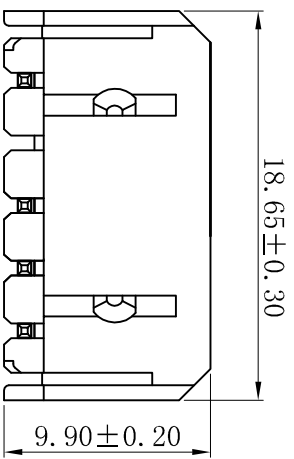


ROHS

缺第4PIN

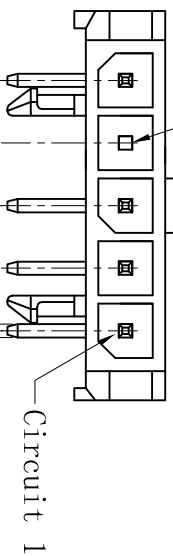

P. C. B. LAYOUT
TOLERANCE: ±0.05mm

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max

- WAFER
- Part No.: W3045R-1x05P-K04P
 - Poles : 05P
 - Housing Material: PA66 15%GF UL94V-0 Black
 - Pin Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

D	更新图面	2019-06-03	陈雄军		
C	修订版本	2015-11-04	陈雄军		
B	变更图宽格式内容	2013-12-27	陈雄军		
A	新版本	2011-05-24	陈雄军		
H	说明 DESCRIPTION	日期 DATE	承认 APPRO.		
1	1	2	3	4	5

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
绘图/DR	陈雄军
审核/CHECK	陈雄军
核准/APPRO	胡进
日期/DATE	2019-06-03

<p>XYDZ® 东莞市祥运连接器有限公司 Dongguan XiangYun Connectors CO., Ltd</p>	
投影法 Projection	第一角投影
单位 Unit	MM
比例/Scale	1:1
大小/Size	A4
页码/Sheet	1/1
版本/Rev	D
品名 (PART NAME)	Molex 3.0mm 90° 5P Wafer Connector Series
料号 (PART NO)	W3045R-1x05P-K04P
状态码	C