
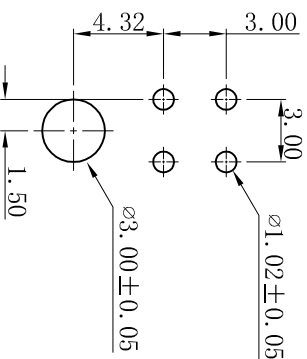
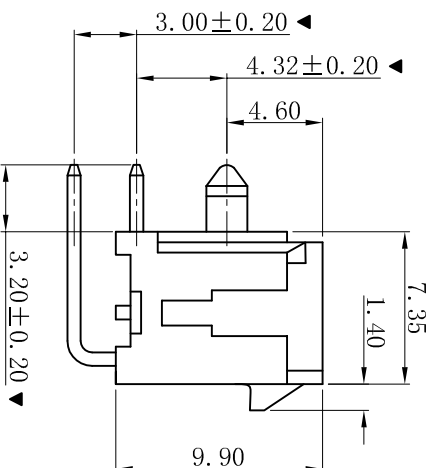
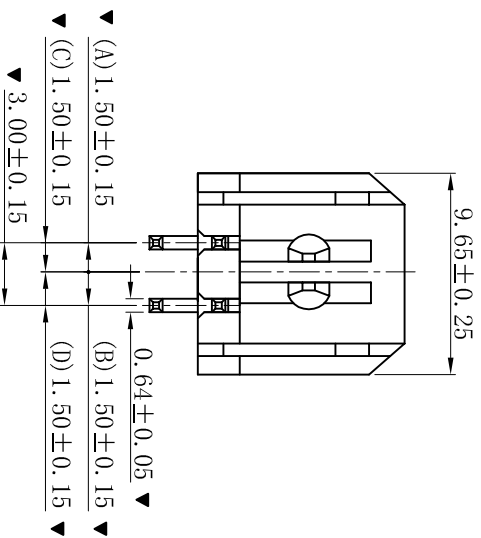


ROHS

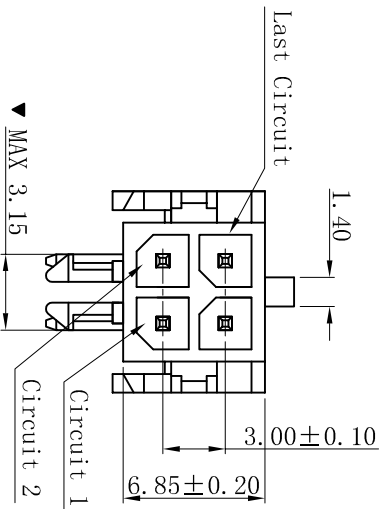

P.C.B. LAYOUT

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000M Ω min
 - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
 - Contact resistance: 20m Ω max
- WAFER
- Part No.: W3045R-2x02P-6TBKSW-II
 - Housing Material: PA6T UL94V-0 Black
 - Pin Material: Brass
 - Contact Area Plating: Matte Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

E	更新图面	2019-06-03	陈雄军	更新图面
D	电镀由镀亮锡变更为镀雾锡	2016-01-11	陈雄军	更新图面
C	修订版本	2015-11-04	陈雄军	更新图面
B	变更图宽格式内容	2013-12-27	陈雄军	更新图面
A	新版本	2011-05-24	陈雄军	更新图面
H	说明	2011-05-24	陈雄军	更新图面
1	版次	2011-05-24	陈雄军	更新图面
1	REV.	2011-05-24	陈雄军	更新图面

2019-06-03	陈雄军	陈雄军	2019-06-03
2016-01-11	陈雄军	陈雄军	2016-01-11
2015-11-04	陈雄军	陈雄军	2015-11-04
2013-12-27	陈雄军	陈雄军	2013-12-27
2011-05-24	陈雄军	陈雄军	2011-05-24

<p>XYDZ[®] 东莞市祥运连接器有限公司</p> <p>Connectors Dongguan XiangYun Connectors CO., Ltd</p>		<p>投影法 Projection</p> <p>单位 Unit MM</p> <p>比例/Scale 1:1</p> <p>大小/Size A4</p> <p>页码/Sheet 1/1</p> <p>版本/Rev E</p>	<p>品名 (PART NAME)</p> <p>Molex 3.0mm 90$^{\circ}$ 2x2P 特殊柱子 Wafer Connector Series</p>	<p>料号 (PART NO)</p> <p>W3045R-2x02P-6TBKSW-II</p>	<p>状态码 C</p>
--	--	---	---	---	------------------