
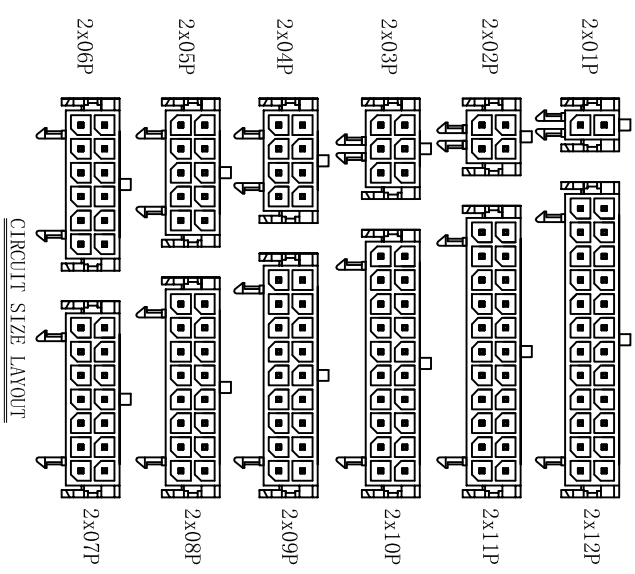


- ### ■ SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40° C~+105° C
 - Contact resistance: 20mΩ max
- ### ■ WAFER
- Part No.: W3045R-2xNP-LPBK-H
 - Poles : 02-24P
 - Housing Material: LCP UL94V-0 Black
 - Pin Material: High Conductivity Copper
 - Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

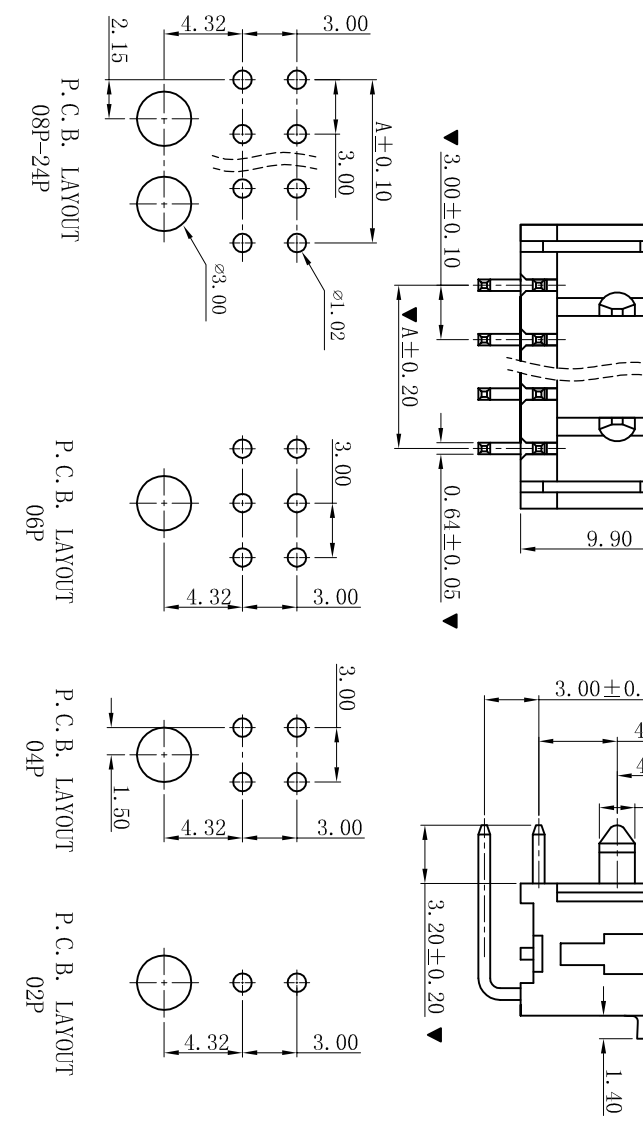

Poles	Dimensions(mm)	
	A	B
02	---	6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

D	更新图画	2019-06-03	陈雄军	更新图画
C	修打版本	2015-11-04	陈雄军	修打版本
B	变更图宽格式内容	2013-12-27	陈雄军	变更图宽格式内容
A	新版本	2011-05-24	陈雄军	新版本
H	说明	日期	承认	说明
1	DESCRPTION	DATE	APPRO.	REV.

一般公差	0±0.30
GENERAL TOLERANCE:	.0±0.25
	.00±0.20
	.000±0.05
ANGLE:	±1°

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connector's CO., Ltd

Connectors

投影法
Projection

单位 Unit
MM

比例/Scale
1:1

大小/Size
A4

页码/SHEET
1/1

版本/Rev
D

品名
(PART NAME)

料号
(PART NO)

W3045R-2xNP-LPBK-H

Molex 3.0mm 90° Wafer
Connector Series

状态码
C