
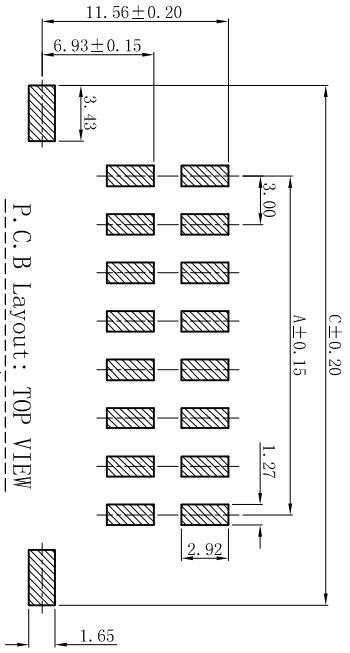

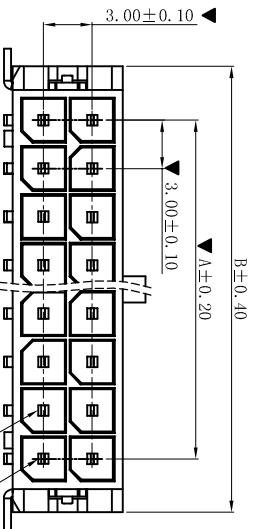




ROHS

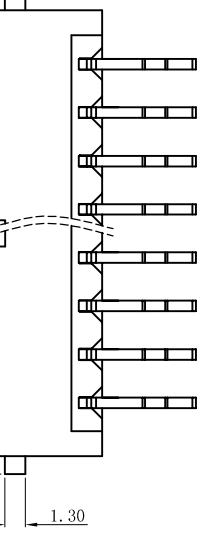

P.C.B Layout: TOP VIEW
Tolerance: ±0.05mm

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40°C~+105°C
 - Contact resistance: 20mΩ max
- WAFER
- Part No.: W3045SR-2xNP-Y
 - Poles : 02-24P
 - Housing Material: LCP UL94V-0 Black
 - Ter Material: Brass
 - Solder Tabs Material: Brass
 - Contact Area Plating: Matte Tin-Plated
 - The Dimension Marked "▲" Must Be Recorded

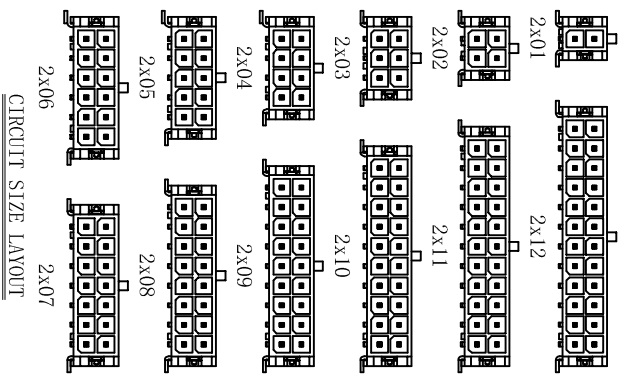

Poles	Dimensions (mm)		
	A	B	C
2x01	--	6.65	11.20
2x02	3.00	9.65	14.20
2x03	6.00	12.65	17.20
2x04	9.00	15.65	20.20
2x05	12.00	18.65	23.20
2x06	15.00	21.65	26.20
2x07	18.00	24.65	29.20
2x08	21.00	27.65	32.20
2x09	24.00	30.65	35.20
2x10	27.00	33.65	38.20
2x11	30.00	36.65	41.20
2x12	33.00	39.65	44.20

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connector's CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .00±0.25 .000±0.05
ANGLE: ±1°	

Connectors

Molex 3.0mm SMT 90° 焊片式
Wafer Connector Series

更新图面 更新版本	2019-06-03	PPD PPD	审核/CHKC 核准/APPRO	陈雄军 胡进	日期/DATE	2019-06-03	说明 DESCRIPTION	版次 REV.
2019-06-03	2018-12-12	PPD PPD	2019-06-03	2019-06-03	2019-06-03	2019-06-03	2019-06-03	2019-06-03