




ROHS

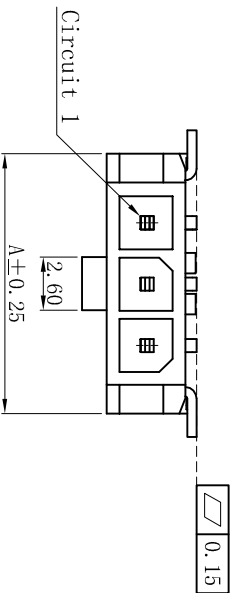


■ SPECIFICATIONS


- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C~+105° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No.: W3045SR-NP-SS
- Poles : 02-12P
- Housing Material: LCP UL94V-0 Black
- Ter Material: Brass
- Solder Tabs Material: Brass
- Contact Area Plating: Matte Tin Plating
- The Dimension Marked “▲” Must Be Recorded

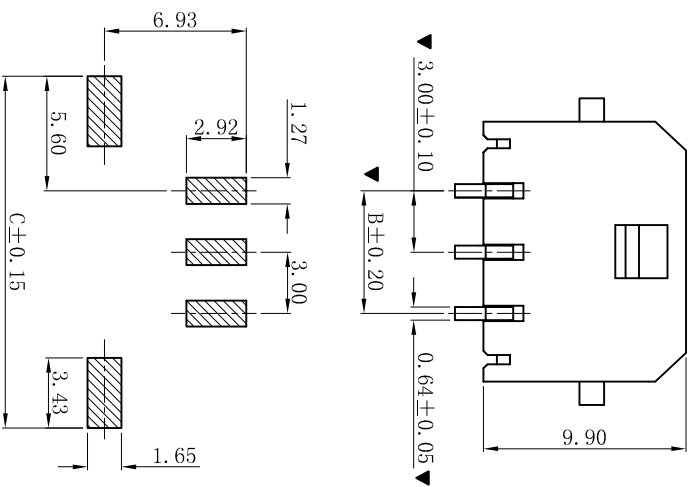

P.C.B Layout: TOP VIEW
Tolerance: ±0.05mm

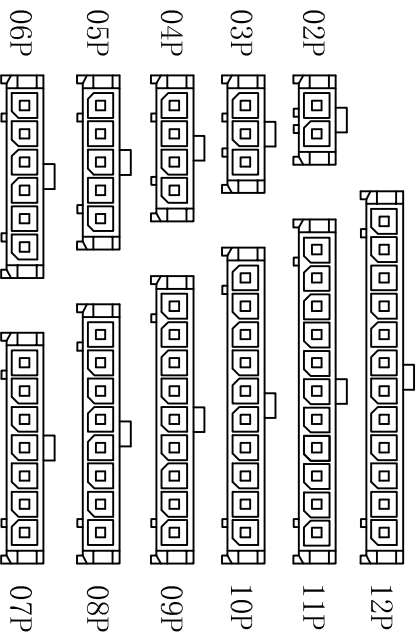

CIRCUIT SIZE LAYOUT

Poles	Dimensions (mm)		
	A	B	C
02	9.65	3.00	14.20
03	12.65	6.00	17.20
04	15.65	9.00	20.20
05	18.65	12.00	23.20
06	21.65	15.00	26.20
07	24.65	18.00	29.20
08	27.65	21.00	32.20
09	30.65	24.00	35.20
10	33.65	27.00	38.20
11	36.65	30.00	41.20
12	39.65	33.00	44.20

D	更新图面	2019-06-03	陈雄军	承认
C	修订版本	2015-11-04	陈雄军	承认
B	变更图宽格式内容	2013-12-27	陈雄军	承认
A	新版本	2011-05-24	陈雄军	承认
H	说明	日期	日期	日期
1	版次	REV.	DESCRIPTION	1

一般公差	0±0.30
GENERAL TOLERANCE:	.0±0.25
	.00±0.20
	.000±0.05
ANGLE: ±1°	
绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connector's CO., Ltd

投影法: 单位: MM 比例/Scale: 1:1 大小/Size: A4 页码/SHEET: 1/1 版本/New: D

品名: (PART NAME) Molex 3.0mm SMT 90° 焊片式 Wafer Connector Series

料号: (PART NO) W3045SR-NP-SS

状态码: C