

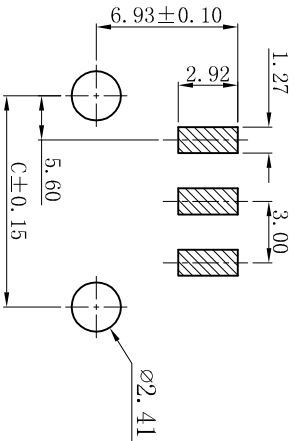
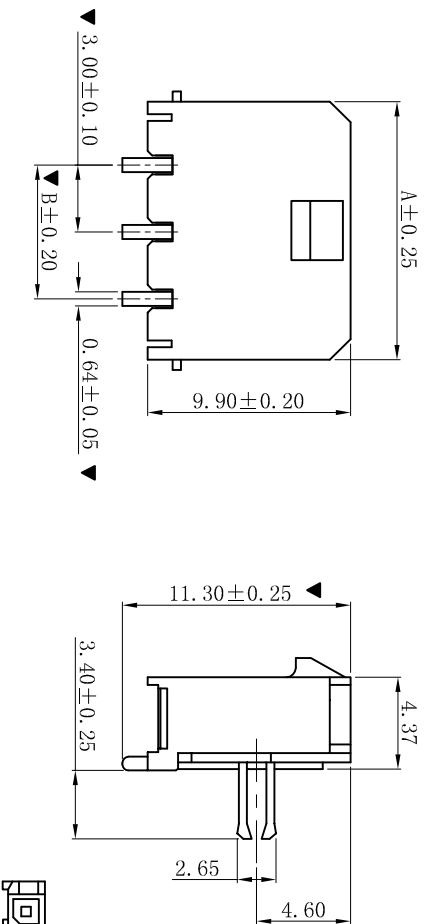


ROHS

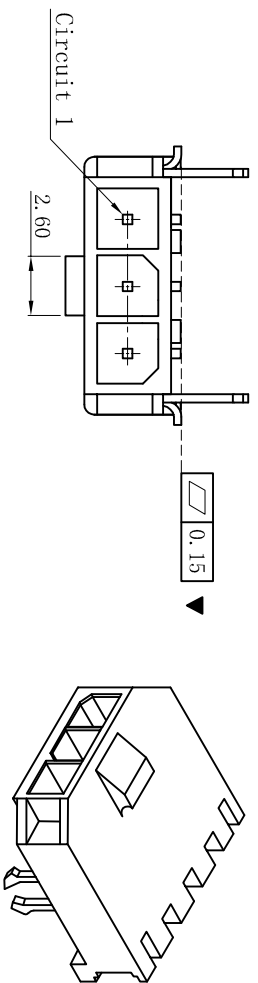

P.C.B Layout: TOP VIEW
Tolerance: ±0.05mm

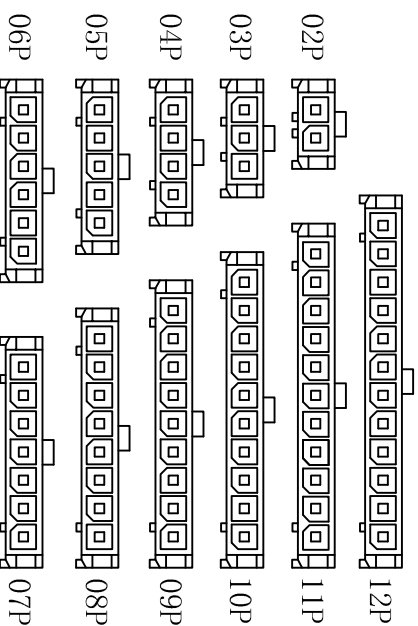

CIRCUIT SIZE LAYOUT

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40° C~+105° C
 - Contact resistance: 20mΩ max

- WAFER
- Part No.: W3045SRD-NP-SS
 - Poles : 02-12P
 - Housing Material: LCP UL94V-0 Black
 - Ter Material: Brass
 - Solder Tabs Material: Brass
 - Contact Area Plating: Tin-Plated
 - The Dimension Marked “▼” Must Be Recorded

Poles	Dimensions (mm)		
	A	B	C
02	9.65	3.00	7.30
03	12.65	6.00	10.30
04	15.65	9.00	13.30
05	18.65	12.00	16.30
06	21.65	15.00	19.30
07	24.65	18.00	22.30
08	27.65	21.00	25.30
09	30.65	24.00	28.30
10	33.65	27.00	31.30
11	36.65	30.00	34.30
12	39.65	33.00	37.30

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors Co., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
绘图/DR	陈雄军
审核/CHECK	陈雄军
批准/APPRO	胡进
日期/DATE	2019-06-03

投影法 Projection: MM
单位 Unit: MM
比例/Scale: 1:1
大小/Size: A4
页码/Sheet: 1/1
版本/Rev: D

品名 (PART NAME): Molex 3.0mm SMT 90° 鱼叉式 Wafer Connector Series
料号 (PART NO): W3045SRD-NP-SS
状态码: C

D	更新图面	2019-06-03	陈雄军	承认
C	修订版本	2015-11-04	陈雄军	
B	变更图宽格式内容	2013-12-27	陈雄军	
A	新版本	2011-05-24	陈雄军	
H	说明	日期	承认	
	DESCRIPTION	DATE	APPRO.	

更新图面	2019-06-03	陈雄军	承认
修订版本	2015-11-04	陈雄军	
变更图宽格式内容	2013-12-27	陈雄军	
新版本	2011-05-24	陈雄军	
说明	日期	承认	
DESCRIPTION	DATE	APPRO.	

品名 (PART NAME)	Molex 3.0mm SMT 90° 鱼叉式 Wafer Connector Series
料号 (PART NO)	W3045SRD-NP-SS
状态码	C