







ROHS

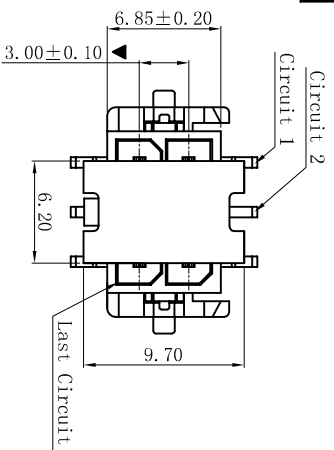

WITH CAP VIEW





WITHOUT CAP VIEW

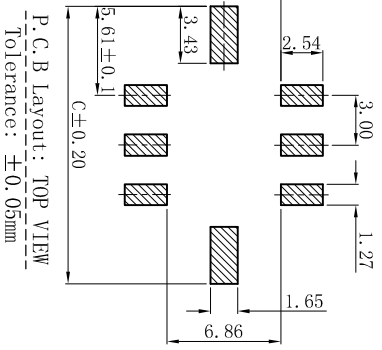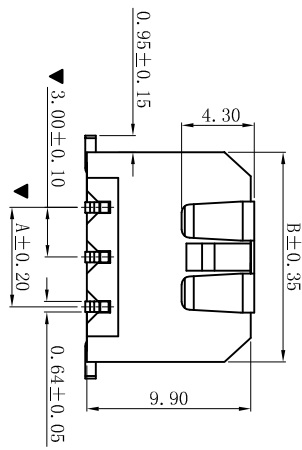

P.C.B Layout: TOP VIEW
Tolerance: ±0.05mm

W3045SV-2xNP-CAGX
No. OF POSITION
CONTACT FINISH
NONE / MATTE TIN 100u" MIN
CAG: GOLD FLASH
CAG2: 2u" MIN GOLD
CAG3: 3u" MIN GOLD
CAG30: 30u" MIN GOLD

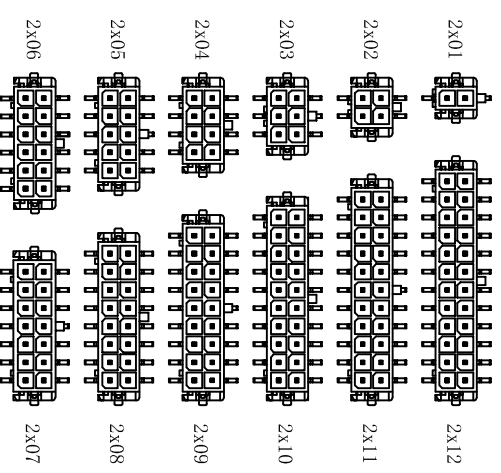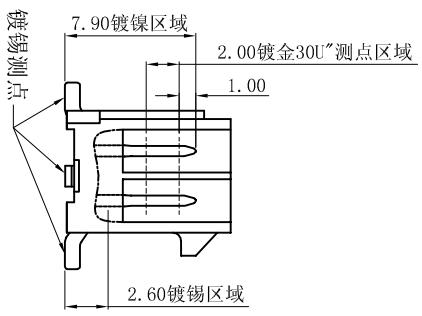

Poles	Dimensions (mm)		
	A	B	C
2x01	--	6.65	11.20
2x02	3.00	9.65	14.20
2x03	6.00	12.65	17.20
2x04	9.00	15.65	20.20
2x05	12.00	18.65	23.20
2x06	15.00	21.65	26.20
2x07	18.00	24.65	29.20
2x08	21.00	27.65	32.20
2x09	24.00	30.65	35.20
2x10	27.00	33.65	38.20
2x11	30.00	36.65	41.20
2x12	33.00	39.65	44.20

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40°C~+105°C
 - Contact resistance: 20mΩ max
- WAFER
- Part No. : W3045SV-2xNP-CAGX-Y
 - Poles : 02-24P
 - Housing Material : LCP UL94V-0 Black
 - Ter Material : Brass
 - Solder Tabs Material : Brass
 - CONTACT AREA: SELECTIVE GOLD OR MATTE TIN PLATING THICKNESS MIN:
 - SOLDERING AREA: MATTE TIN 100u" PLATING THICKNESS MIN.
 - UNDER PLATING: NICKEL PLATING 30u"
 - THICKNESS MIN. OVERALL
 - The Dimension Marked "▲" Must Be Recorded

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .000±0.05
ANGLE: ±1°	

XYDZ®
Connectors

东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

品名 (PART NAME) : Molex 3.0mm SMT 180° 焊片式 Wafer Connector Series

料号 (PART NO) : W3045SV-2xNP-CAGX-Y 状态码 C

D	更新图面	2019-06-03	陈雄军	更新图面	2019-06-03	陈雄军
C	修打版本	2015-11-04	陈雄军	修打版本	2015-11-04	陈雄军
B	变更图规格式内容	2013-12-27	陈雄军	变更图规格式内容	2013-12-27	陈雄军
A	新版本	2011-05-24	陈雄军	新版本	2011-05-24	陈雄军
H	版次 RRV.	说明 DESCRIPTION	日期 DATE	承认 APPRO.	日期 DATE	承认 APPRO.
1	1	2	3	4	5	6

投影法 Projection	MM	品名 (PART NAME)	Molex 3.0mm SMT 180° 焊片式 Wafer Connector Series
单位 Unit	MM	料号 (PART NO)	W3045SV-2xNP-CAGX-Y
比例/Scale	1:1	状态码	C
大小/Size	A4		
页码/SHEET	1/1		
版本/Rev	D		