


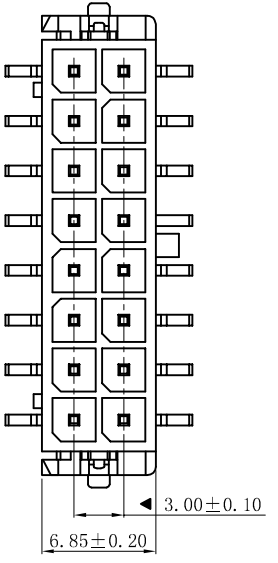
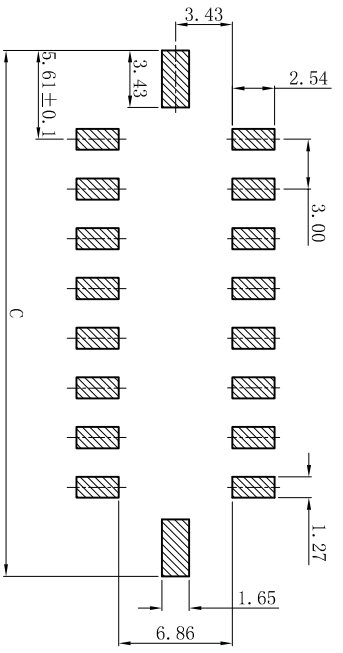



RoHS

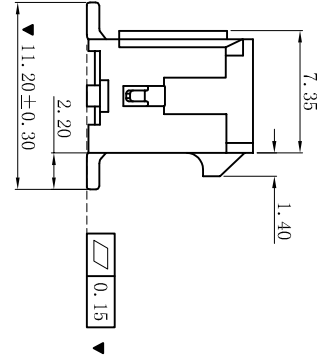

WITH CAP VIEW

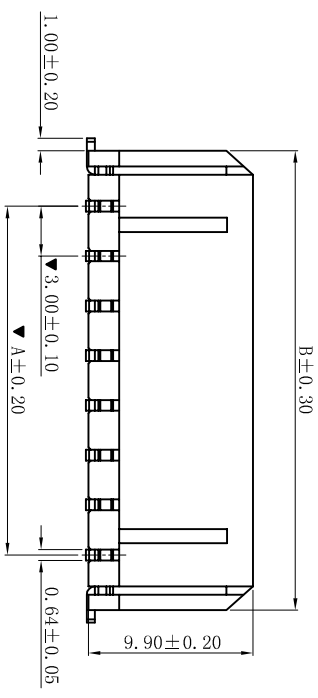

P.C.B Layout: TOP VIEW
Tolerance: ±0.05mm

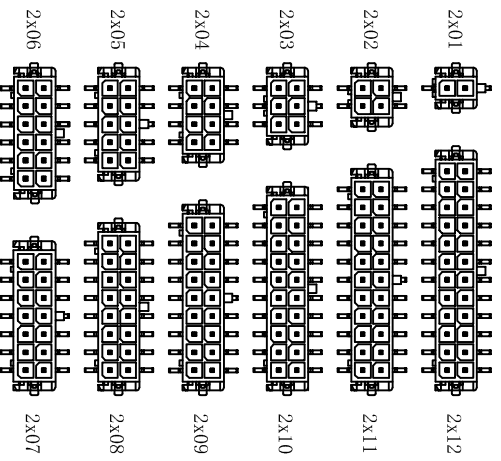

Poles	Dimensions (mm)		
	A	B	C
2x01	--	6.65	11.20
2x02	3.00	9.65	14.20
2x03	6.00	12.65	17.20
2x04	9.00	15.65	20.20
2x05	12.00	18.65	23.20
2x06	15.00	21.65	26.20
2x07	18.00	24.65	29.20
2x08	21.00	27.65	32.20
2x09	24.00	30.65	35.20
2x10	27.00	33.65	38.20
2x11	30.00	36.65	41.20
2x12	33.00	39.65	44.20

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40° C~+105° C
 - Contact resistance: 20mΩ max
- WAFER**
- Part No. : W3045SV-2xNP-SS
 - Poles : 02-24P
 - Housing Material: LCP UL94V-0 Black
 - Ter Material: Brass
 - Solder Tabs Material: Brass
 - Contact Area Plating: Matte Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

一般公差 GENERAL TOLERANCE:	0±0.25 .00±0.20 .000±0.05
ANGLE: ±1°	

更新图面	2019-06-03	陈雄军
修打版本	2015-11-04	陈雄军
变更图宽格式内容	2013-12-27	陈雄军
新版本	2011-05-24	陈雄军
说明	日期	承认
DESCRIPTION	DATE:	APPRO.

版次	1	2	3	4	5	6	7	8	9	10
REV.										

投影法 Projection	第一角投影	品名 (PART NAME)	Molex3.0mm SWT 180° 焊片式 Wafer Connector Series	料号 (PART NO)	W3045SV-2xNP-SS	状态码	C
单位 Unit	MM	比例/Scale	1:1	页码/SHEET	1/1		
大小/Size	A4	日期/DATE	2019-06-03	审核/CHKC	陈雄军		
核准/APPRO	胡进	日期/DATE	2019-06-03	承认	陈雄军		
绘图/DR	陈雄军	日期/DATE	2019-06-03	承认	陈雄军		
更新图面	2019-06-03	日期/DATE	2019-06-03	承认	陈雄军		