
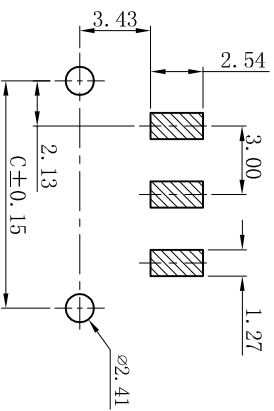
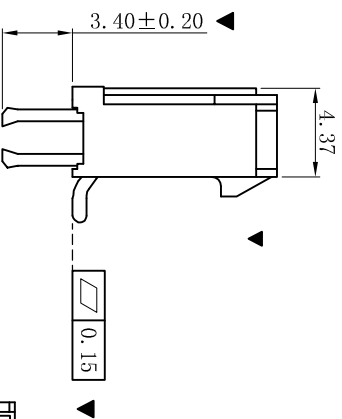




ROHS

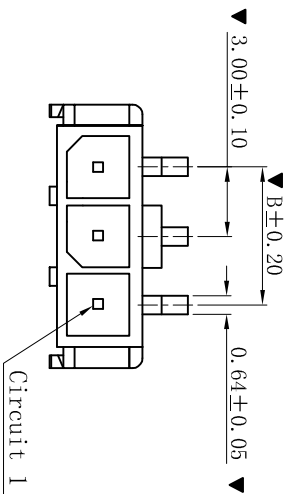


P.C.B Layout: TOP VIEW
Tolerance: ±0.05mm

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C~+105° C
- Contact resistance: 20mΩ max

■ WAFER

- Part No. : W3045VD-NP
- Poles : 02-12P
- Housing Material: LCP UL94V-0 Black
- Ter Material: Brass
- Solder Tabs Material: Brass
- Contact Area Plating: Matte Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

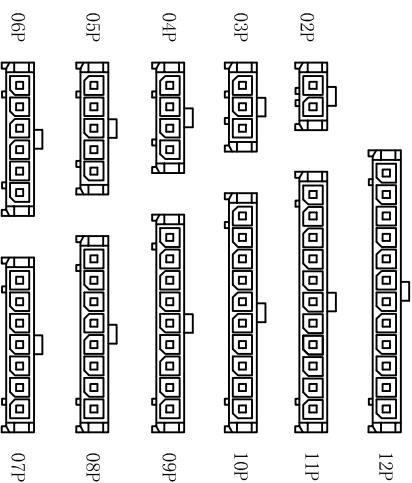

CIRCUIT SIZE LAYOUT

Poles	Dimensions (mm)		
	A	B	C
02	9.65	3.00	7.30
03	12.65	6.00	10.30
04	15.65	9.00	13.30
05	18.65	12.00	16.30
06	21.65	15.00	19.30
07	24.65	18.00	22.30
08	27.65	21.00	25.30
09	30.65	24.00	28.30
10	33.65	27.00	31.30
11	36.65	30.00	34.30
12	39.65	33.00	37.30

一般公差 GENERAL TOLERANCE:	0±0.30 .0±0.25 .00±0.20 .000±0.05
ANGLE: ±1°	

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

绘图/DR	PP/Date	投影法 Projection	品名 (PART NAME)	Molex 3.0mm SMT 180° 鱼叉式 Wafer Connector Series
审核/CHECK	陈雄军	单位 Unit	料号 (PART NO)	W3045VD-NP
核准/APPRO	胡进	比例/Scale	状态码	
日期/DATE	2019-06-03	大小/Size		
日期/DATE	2019-06-03	页码/SHEET		
日期/DATE	2019-06-03	版本/Rev		

更新图面	2019-06-03	PP/Date	说明 DESCRIPTION
新版本	2018-12-12	PP/Date	
版次 REV.	1	APPRO.	