

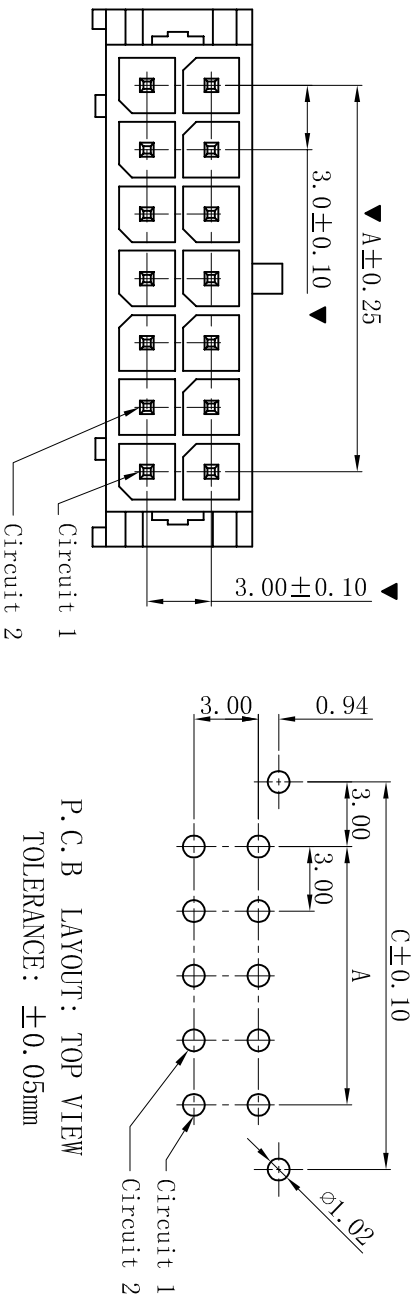


RoHS

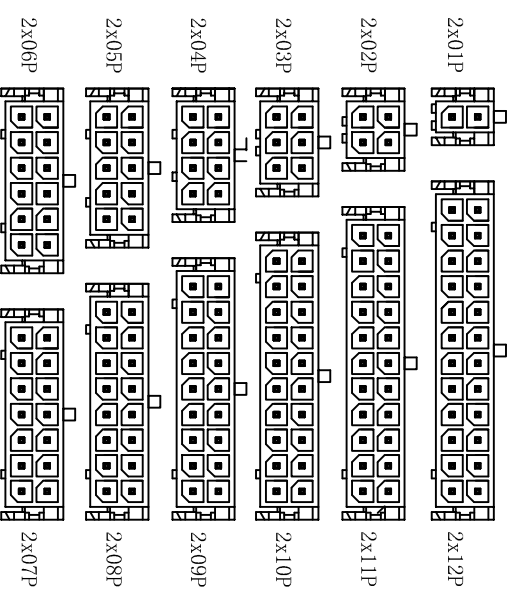

P.C.B LAYOUT: TOP VIEW
TOLERANCE: ±0.05mm

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -40° C~+105° C
- Contact resistance: 20mΩ max
- WAFER
- Part No.: W3045V-2xNP-QC
- Poles : 02-24P
- Housing Material: LCP UL94V-0 Black
- Pin Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked "▼" Must Be Recorded

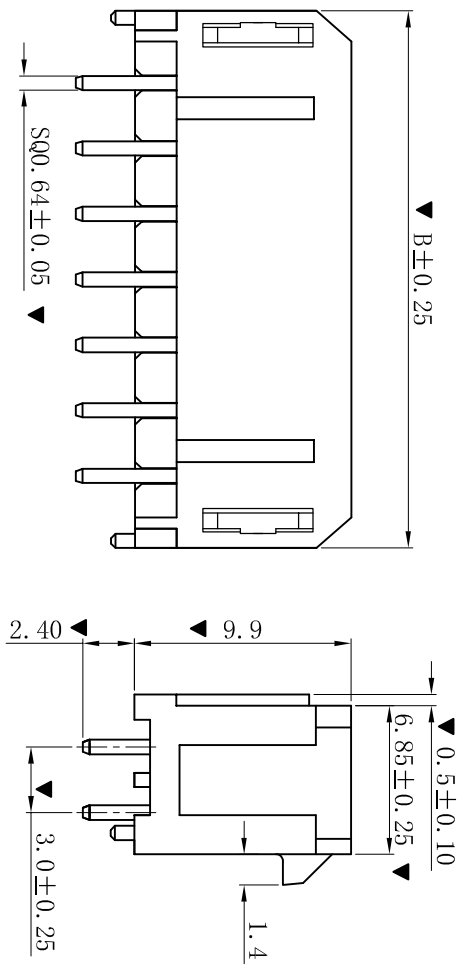

Poles	Dimensions (mm)		
	A	B	C
2x01	--	6.65	6.00
2x02	3.00	9.65	9.00
2x03	6.00	12.65	12.00
2x04	9.00	15.65	15.00
2x05	12.00	18.65	18.00
2x06	15.00	21.65	21.00
2x07	18.00	24.65	24.00
2x08	21.00	27.65	27.00
2x09	24.00	30.65	30.00
2x10	27.00	33.65	33.00
2x11	30.00	36.65	36.00
2x12	33.00	39.65	39.00

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors CO., Ltd

一般公差
GENERAL TOLERANCE:
ANGLE: ±1°

投影法
Projection
单位 Unit
MM

品名 (PART NAME)
Molex 3.0mm 180° Wafer
Connector Series

绘图/DR
审核/CHECK
批准/APPRO

比例/Scale
大小/SIZE
页码/SHEET

料号 (PART NO)
W3045V-2xNP-QC

日期/DATE
2018-10-08

日期/DATE
2018-10-08

状态码
C

说明
DESCRIPTION
新版本

承认
APPRO.

版本号
REV. A

1	2	3	4	5	6	7	8	9	10
---	---	---	---	---	---	---	---	---	----