
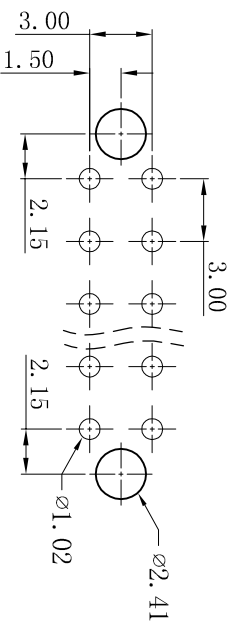
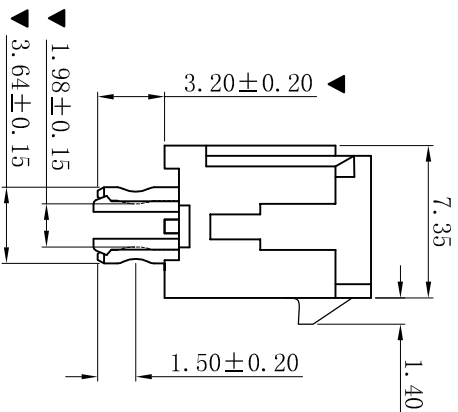
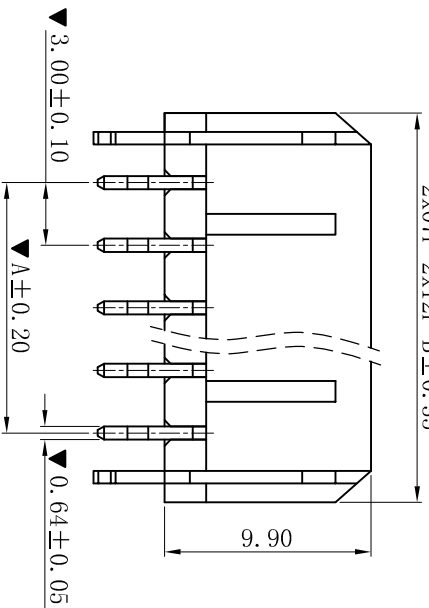
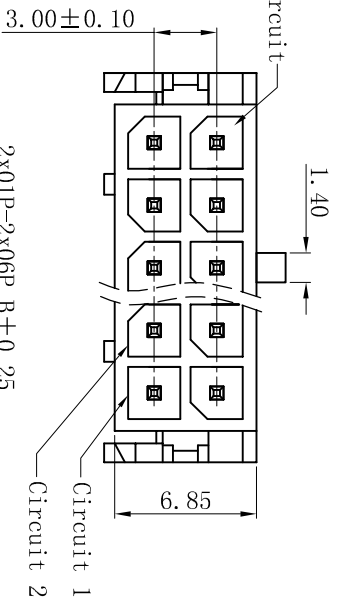


RoHS

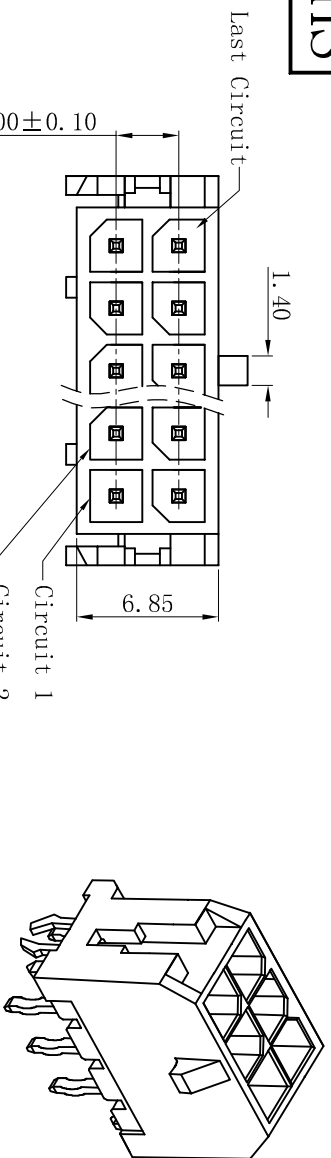


P. C. B. LAYOUT

- ### ■ SPECIFICATIONS
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -25° C~+85° C
 - Contact resistance: 20mΩ max

■ WAFER

- Part No.: W3045VD-2xNP-B
- Poles : 02-24P
- Housing Material: PA66 15%GF UL94V-0 Black
- Pin Material: Brass
- Solder Tabs Material: Brass
- Contact Area Plating: Tin-Plated
- The Dimension Marked “▼” Must Be Recorded

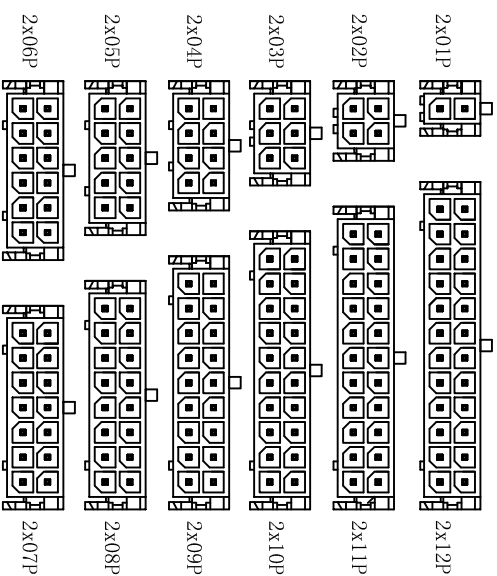

CIRCUIT SIZE LAYOUT

Poles	Dimensions (mm)	
	A	B
02	---	6.65
04	3.00	9.65
06	6.00	12.65
08	9.00	15.65
10	12.00	18.65
12	15.00	21.65
14	18.00	24.65
16	21.00	27.65
18	24.00	30.65
20	27.00	33.65
22	30.00	36.65
24	33.00	39.65

XYDZ® 东莞市祥运连接器有限公司
Dongguan XiangYun Connectors Co., Ltd

一般公差
GENERAL TOLERANCE:
0±0.30
.00±0.25
.000±0.05
ANGLE: ±1°

绘图/DR
审核/CHECK
批准/APPRO

投影法
单位 Unit
比例/Scale

品名
(PART NAME)
料号
(PART NO)状态码

陈雄军
陈雄军
胡进

陈雄军
陈雄军
胡进

Mollex 3.0mm DIP 180° 鱼叉式
无柱 Wafer Connector Series
W3045VD-2xNP-B
C

D	更新图画	2019-06-03	陈雄军	更新图画	2019-06-03
C	修订版本	2015-11-04	陈雄军	变更图宽格式内容	2013-12-27
B	新版本	2011-05-24	陈雄军	说明	2011-05-24
A	版次	说明	承认	日期	APPRO.
H	REV.	DESCRIPTION	DATE.	APPRO.	DATE.

1 2 3 4 5 6 7 8 9 10