
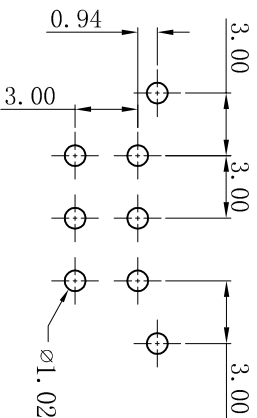
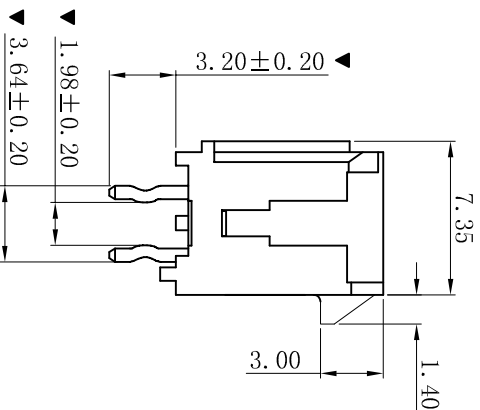
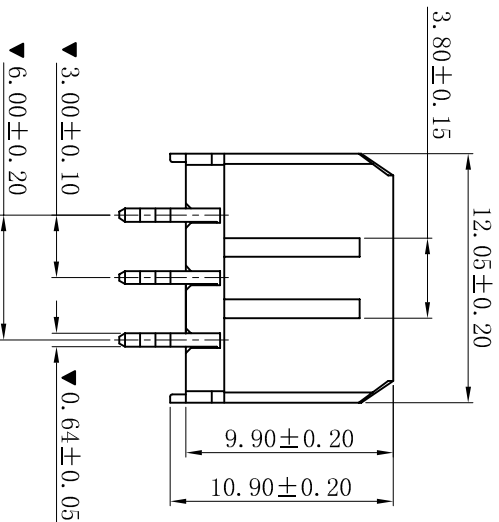



RoHS

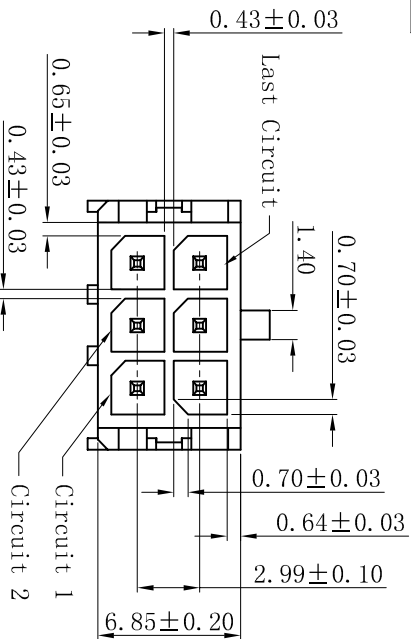

P. C. B. LAYOUT

- SPECIFICATIONS
- Voltage rating: 250V AC, DC
  - Current rating: 5A, AC, DC
  - Withstanding Voltage: 1500V AC/minute
  - Insulation resistance: 1000M $\Omega$  min
  - Temperature range: -25 $^{\circ}$ C~+85 $^{\circ}$ C
  - Contact resistance: 10m $\Omega$  max
- WAFER
- Part No.: W3045VF-2X03P-B
  - Housing Material: PA66 15%GF U194V-0 Black
  - Pin Material: Brass
  - Contact Area Plating: Tin-Plated
  - The Dimension Marked "▲" Must Be Recorded

更新图面		2019-06-03		陈雄军		一般公差 GENERAL TOLERANCE:		0±0.30 .0±0.25 .00±0.20 .000±0.05		投影法 Projection		品名 (PART NAME)		Molex 3.0mm 180 $^{\circ}$ 2x3P 特殊胶壳 Wafer Connector Series	
修訂版本		2015-11-04		陈雄军		ANGLE: ±1 $^{\circ}$		▲		单位 Unit		料号 (PART NO)		W3045VF-2X03P-B	
变更图宽格式内容		2013-12-27		陈雄军		▲		▲		比例/Scale		状态码		C	
新版本		2011-05-24		陈雄军		▲		▲		大小/Size		A4			
说明		日期		承认		日期/DATE		2019-06-03		页码/Sheet		1/1			
DESCRPTION		DATE		APPRO.		日期/DATE		2019-06-03		版本/Rev		D			

XYDZ<sup>®</sup> 东莞市祥运连接器有限公司  
Dongguan XiangYun Connectors CO., Ltd